


# Anruike 安瑞科/SMD POWER INDUCTORS CDL54 SERIES

外型及尺寸 Shape and size ( unit: mm )

Anruike/安瑞科

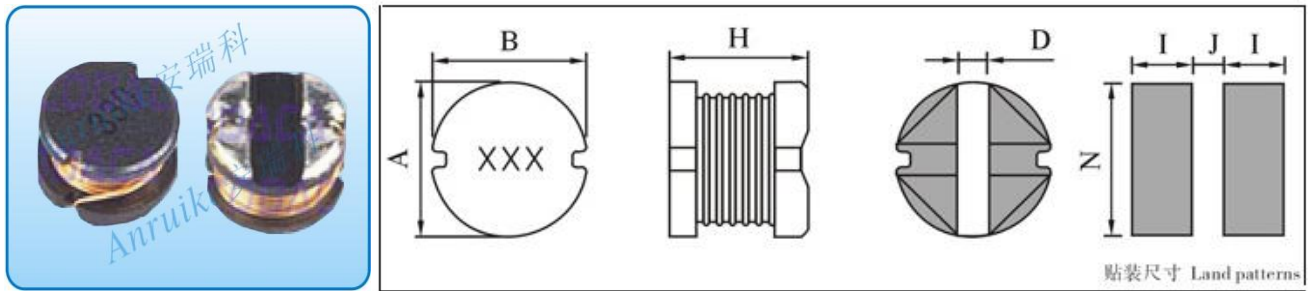

产品型号	A±0.3	B±0.3	H±0.3	D	N	I	J	最小包装数量
CDL54	5.6	5.6	4.5	2.0	6.0	3.0	1.5	2000/R

电气参数 Electrical parameters

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDL54-1R2M	1.0	±20	100KHz/0.25V	0.06	4.00
CDL54-1R2M	1.2	±20	100KHz/0.25V	0.06	3.80
CDL54-1R5M	1.5	±20	100KHz/0.25V	0.07	3.30
CDL54-1R8M	1.8	±20	100KHz/0.25V	0.07	2.95
CDL54-2R2M	2.2	±20	100KHz/0.25V	0.08	0.60
CDL54-2R7M	2.7	±20	100KHz/0.25V	0.08	2.15
CDL54-3R3M	3.3	±20	100KHz/0.25V	0.08	2.00
CDL54-3R9M	3.9	±20	100KHz/0.25V	0.09	1.95
CDL54-4R7M	4.7	±20	100KHz/0.25V	0.10	1.70
CDL54-5R6M	5.6	±20	100KHz/0.25V	0.10	1.60
CDL54-6R8M	6.8	±20	100KHz/0.25V	0.10	1.56
CDL54-8R2M	8.2	±20	100KHz/0.25V	0.12	1.50
CDL54-100M	10	±20	100KHz/0.25V	0.14	1.44
CDL54-120M	12	±20	100KHz/0.25V	0.15	1.40
CDL54-150M	15	±20	100KHz/0.25V	0.18	1.30
CDL54-180M	18	±20	100KHz/0.25V	0.20	1.23
CDL54-220M	22	±20	100KHz/0.25V	0.23	1.11
CDL54-270K	27	±20	100KHz/0.25V	0.32	0.97
CDL54-330K	33	±20	100KHz/0.25V	0.36	0.88
CDL54-390K	39	±20	100KHz/0.25V	0.38	0.81
CDL54-470K	47	±20	100KHz/0.25V	0.40	0.72
CDL54-560K	56	±20	100KHz/0.25V	0.42	0.68
CDL54-680K	68	±20	100KHz/0.25V	0.46	0.61
CDL54-820K	82	±20	100KHz/0.25V	0.60	0.58

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818