
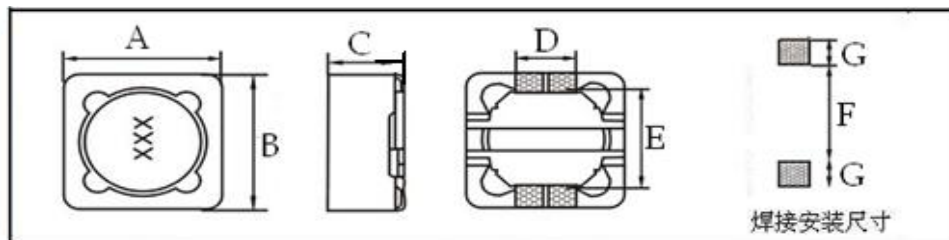


# Anruike 安瑞科/SMD POWER INDUCTORS CDRH127 SERIES

外型及尺寸 Shape and size ( unit: mm )

Anruike/安瑞科



| 产品型号    | A±0.3 | B±0.3 | C (MAX) | D   | E   | F   | G   | 载带盘装     |
|---------|-------|-------|---------|-----|-----|-----|-----|----------|
| CDRH127 | 12.0  | 12.0  | 8.0     | 5.0 | 7.6 | 7.0 | 2.9 | 500PCS/R |

电气性能 Electrical properties

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

| 产品型号         | 电感量<br>(uH) | 公差<br>(%) | 测试频率         | 直流电阻<br>RDC (Ω) (Max) | 额定电流<br>IDC (A) (Max) |
|--------------|-------------|-----------|--------------|-----------------------|-----------------------|
| CDRH127-100M | 10          | ±20       | 100KHz/0.25V | 0.022                 | 10.0                  |
| CDRH127-120M | 12          | ±20       | 100KHz/0.25V | 0.025                 | 6.80                  |
| CDRH127-150M | 15          | ±20       | 100KHz/0.25V | 0.03                  | 9.0                   |
| CDRH127-180M | 18          | ±20       | 100KHz/0.25V | 0.039                 | 5.90                  |
| CDRH127-220M | 22          | ±20       | 100KHz/0.25V | 0.04                  | 7.5                   |
| CDRH127-270M | 27          | ±20       | 100KHz/0.25V | 0.046                 | 5.40                  |
| CDRH127-330M | 33          | ±20       | 100KHz/0.25V | 0.06                  | 5.9                   |
| CDRH127-390M | 39          | ±20       | 100KHz/0.25V | 0.073                 | 4.65                  |
| CDRH127-470M | 47          | ±20       | 100KHz/0.25V | 0.078                 | 5.0                   |
| CDRH127-560M | 56          | ±20       | 100KHz/0.25V | 0.089                 | 4.8                   |
| CDRH127-680M | 68          | ±20       | 100KHz/0.25V | 0.12                  | 4.20                  |
| CDRH127-820M | 82          | ±20       | 100KHz/0.25V | 0.14                  | 3.80                  |
| CDRH127-101M | 100         | ±20       | 100KHz/0.25V | 0.150                 | 3.8                   |
| CDRH127-121M | 120         | ±20       | 100KHz/0.25V | 0.155                 | 2.60                  |
| CDRH127-151M | 150         | ±20       | 100KHz/0.25V | 0.22                  | 2.9                   |
| CDRH127-181M | 180         | ±20       | 100KHz/0.25V | 0.27                  | 2.7                   |
| CDRH127-221M | 220         | ±20       | 100KHz/0.25V | 0.34                  | 2.4                   |
| CDRH127-271M | 270         | ±20       | 100KHz/0.25V | 0.40                  | 2.0                   |
| CDRH127-331M | 330         | ±20       | 100KHz/0.25V | 0.52                  | 1.9                   |
| CDRH127-391M | 390         | ±20       | 100KHz/0.25V | 0.700                 | 1.10                  |
| CDRH127-471M | 470         | ±20       | 100KHz/0.25V | 0.980                 | 1.00                  |
| CDRH127-561M | 560         | ±20       | 100KHz/0.25V | 1.070                 | 0.88                  |
| CDRH127-681M | 680         | ±20       | 100KHz/0.25V | 1.460                 | 0.75                  |
| CDRH127-821M | 820         | ±20       | 100KHz/0.25V | 1.623                 | 0.70                  |
| CDRH127-102M | 1000        | ±20       | 100KHz/0.25V | 1.820                 | 0.65                  |

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商 Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818