


Anruike 安瑞科/SMD POWER INDUCTORS CDL75 SERIES

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科

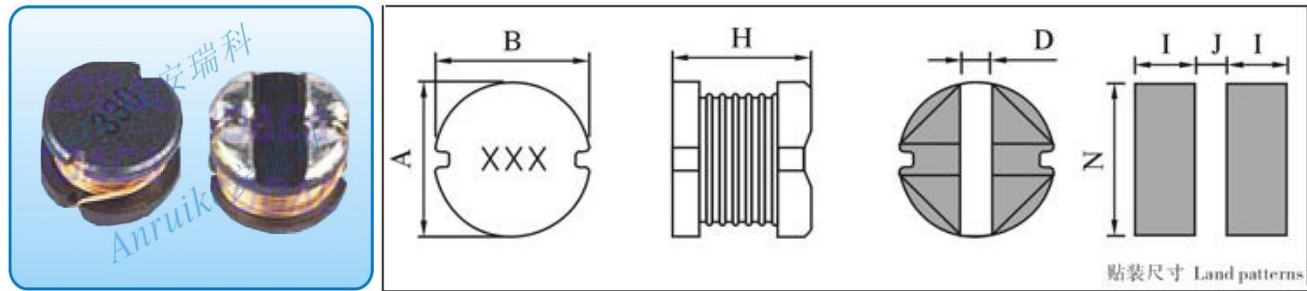

产品型号	A±0.3	B±0.3	H±0.3	D	N	I	J	最小包装数量
CDL75	7.5	7.5	5.0	2.0	8.0	3.5	1.5	1000/R

电气参数 Electrical parameters

Anruike/安瑞科

产品型号	电感量 (μH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDL75-100M	10	± 20	100KHz/0.25V	0.07	2.30
CDL75-120M	12	± 20	100KHz/0.25V	0.08	2.00
CDL75-150M	15	± 20	100KHz/0.25V	0.09	1.80
CDL75-180M	18	± 20	100KHz/0.25V	0.10	1.60
CDL75-220M	22	± 20	100KHz/0.25V	0.11	1.50
CDL75-270M	27	± 20	100KHz/0.25V	0.12	1.30
CDL75-330K	33	± 20	100KHz/0.25V	0.13	1.20
CDL75-390K	39	± 20	100KHz/0.25V	0.16	1.10
CDL75-470K	47	± 20	100KHz/0.25V	0.18	1.05
CDL75-560K	56	± 20	100KHz/0.25V	0.24	0.94
CDL75-680K	68	± 20	100KHz/0.25V	0.28	0.85
CDL75-820K	82	± 20	100KHz/0.25V	0.37	0.78
CDL75-101K	100	± 20	100KHz/0.25V	0.46	0.72
CDL75-121K	120	± 20	100KHz/0.25V	0.48	0.66
CDL75-151K	150	± 20	100KHz/0.25V	0.65	0.58
CDL75-181K	180	± 20	100KHz/0.25V	0.71	0.51
CDL75-221K	220	± 20	100KHz/0.25V	0.96	0.49
CDL75-271K	270	± 20	100KHz/0.25V	1.11	0.42
CDL75-331K	330	± 20	100KHz/0.25V	1.78	0.40
CDL75-391K	390	± 20	100KHz/0.25V	1.79	0.36
CDL75-471K	470	± 20	100KHz/0.25V	1.96	0.34
CDL75-561K	560	± 20	100KHz/0.25V	2.35	0.32
CDL75-681K	680	± 20	100KHz/0.25V	3.16	0.29
CDL75-821K	820	± 20	100KHz/0.25V	3.18	0.30

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818