


# Anruike 安瑞科/SMD POWER INDUCTORS CDL95 SERIES

外型及尺寸 Shape and size ( unit: mm )

Anruike/安瑞科

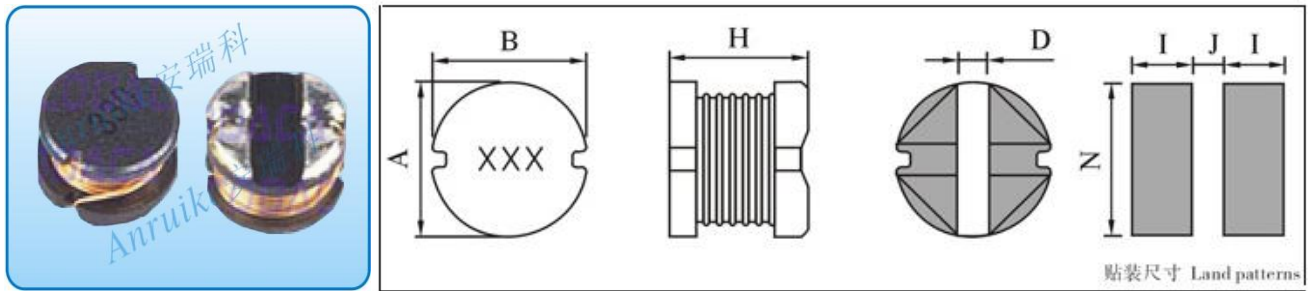

产品型号	A±0.3	B±0.3	H±0.3	D	N	I	J	最小包装数量
CDL95	9.5	9.5	5.5	2.5	10.0	4.0	2.0	1000/R

电气参数 Electrical parameters

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDL95-1R0M	1.0	±20	100KHz/0.25V	0.04	7.00
CDL95-1R2M	1.2	±20	100KHz/0.25V	0.04	6.80
CDL95-1R5M	1.5	±20	100KHz/0.25V	0.04	6.50
CDL95-1R8M	1.8	±20	100KHz/0.25V	0.05	6.06
CDL95-2R2M	2.2	±20	100KHz/0.25V	0.05	5.45
CDL95-2R7M	2.7	±20	100KHz/0.25V	0.05	5.00
CDL95-3R3M	3.3	±20	100KHz/0.25V	0.06	4.65
CDL95-3R9M	3.9	±20	100KHz/0.25V	0.06	4.10
CDL95-4R7M	4.7	±20	100KHz/0.25V	0.06	3.80
CDL95-5R6M	5.6	±20	100KHz/0.25V	0.06	3.50
CDL95-6R8M	6.8	±20	100KHz/0.25V	0.06	3.00
CDL95-8R2M	8.2	±20	100KHz/0.25V	0.07	2.80
CDL95-100M	10	±20	100KHz/0.25V	0.07	2.60
CDL95-120M	12	±20	100KHz/0.25V	0.08	2.45
CDL95-150M	15	±20	100KHz/0.25V	0.09	2.27
CDL95-180M	18	±20	100KHz/0.25V	0.10	2.15
CDL95-220M	22	±20	100KHz/0.25V	0.11	1.95
CDL95-270M	27	±10	100KHz/0.25V	0.12	1.75
CDL95-330K	33	±10	100KHz/0.25V	0.14	1.50
CDL95-390K	39	±10	100KHz/0.25V	0.17	1.37
CDL95-470K	47	±10	100KHz/0.25V	0.19	1.28
CDL95-560K	56	±10	100KHz/0.25V	0.23	1.17
CDL95-680K	68	±10	100KHz/0.25V	0.25	1.11
CDL95-820K	82	±10	100KHz/0.25V	0.35	1.00
CDL95-101K	100	±10	100KHz/0.25V	0.40	0.97
CDL95-151K	150	±10	100KHz/0.25V	0.47	0.89
CDL95-181K	180	±10	100KHz/0.25V	0.63	0.78
CDL95-221K	220	±10	100KHz/0.25V	0.73	0.72
CDL95-271K	270	±10	100KHz/0.25V	0.97	0.66
CDL95-331K	330	±10	100KHz/0.25V	1.15	0.57
CDL95-391K	390	±10	100KHz/0.25V	1.30	0.52

CDL95-471K	470	±10	100KHz/0.25V	1.48	0.48
CDL95-561K	560	±10	100KHz/0.25V	1.90	0.42
CDL95-681K	680	±10	100KHz/0.25V	2.25	0.33
CDL95-821K	820	±10	100KHz/0.25V	2.55	0.28
CDL95-102K	1000	±10	100KHz/0.25V	2.86	0.24
CDL95-122K	1200	±10	100KHz/0.25V	3.55	0.23
CDL95-152K	1500	±10	100KHz/0.25V	4.00	0.22
CDL95-182K	1800	±10	100KHz/0.25V	4.65	0.20
CDL95-222K	2200	±10	100KHz/0.25V	5.15	0.18
CDL95-272K	2700	±10	100KHz/0.25V	5.95	0.17
CDL95-332K	3300	±10	100KHz/0.25V	6.35	0.16
CDL95-392K	3900	±10	100KHz/0.25V	7.05	0.15
CDL95-472K	4700	±10	100KHz/0.25V	7.65	0.14
CDL95-562K	5600	±10	100KHz/0.25V	8.15	0.13
CDL95-682K	6800	±10	100KHz/0.25V	9.26	0.12
CDL95-822K	8200	±10	100KHz/0.25V	10.0	0.11
CDL95-103K	10000	±10	100KHz/0.25V	13.5	0.10
CDL95-123K	12000	±10	100KHz/0.25V	15.0	0.09
CDL95-153K	15000	±10	100KHz/0.25V	18.0	0.08

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 [优质功率电感专业生产商...](#) Tel:0755-29805463 27994543 FAX:0755-29805221  
 网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818