


Anruike 安瑞科/SMD POWER INDUCTORS CDL137 SERIES

外型及尺寸 Shape and size (unit: mm) Anruike/安瑞科

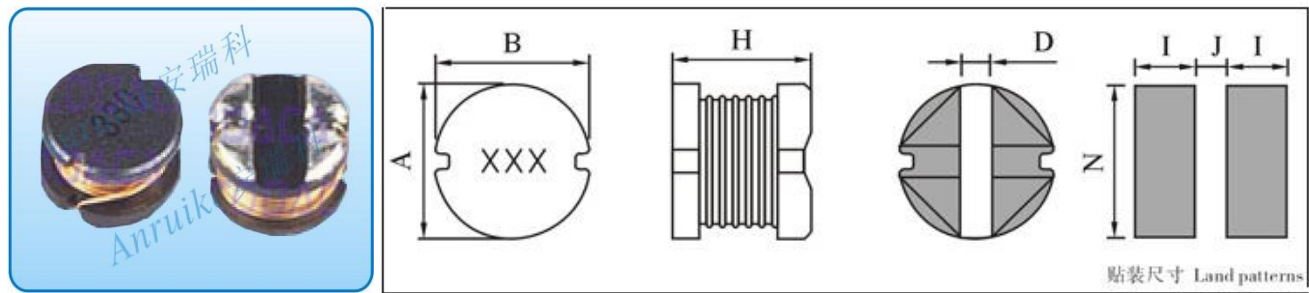

产品型号	A±0.3	B±0.3	H±0.3	D	N	I	J	最小包装数量
CDL137	13	13	7.0	4.7	13.5	4.5	4.2	500/R

电气参数 Electrical parameters Anruike/安瑞科

产品型号	电感量 (μ H)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDL137-5R6M	5.6	± 20	100KHz/0.25V	0.015	6.50
CDL137-6R8M	6.8	± 20	100KHz/0.25V	0.017	6.00
CDL137-8R2M	8.2	± 20	100KHz/0.25V	0.019	5.80
CDL137-100M	10	± 20	100KHz/0.25V	0.023	5.60
CDL137-120M	12	± 20	100KHz/0.25V	0.030	4.80
CDL137-150M	15	± 20	100KHz/0.25V	0.034	4.50
CDL137-180M	18	± 20	100KHz/0.25V	0.040	4.20
CDL137-220M	22	± 20	100KHz/0.25V	0.060	3.60
CDL137-270M	27	± 20	100KHz/0.25V	0.070	3.30
CDL137-330K	33	± 20	100KHz/0.25V	0.075	3.10
CDL137-390K	39	± 20	100KHz/0.25V	0.082	2.90
CDL137-470K	47	± 20	100KHz/0.25V	0.112	2.70
CDL137-560K	56	± 20	100KHz/0.25V	0.120	2.50
CDL137-680K	68	± 20	100KHz/0.25V	0.140	2.30
CDL137-820K	82	± 20	100KHz/0.25V	0.180	2.10
CDL137-101K	100	± 20	100KHz/0.25V	0.230	1.90
CDL137-121K	120	± 20	100KHz/0.25V	0.260	1.80
CDL137-151K	150	± 20	100KHz/0.25V	0.350	1.60
CDL137-181K	180	± 20	100KHz/0.25V	0.380	1.50
CDL137-221K	220	± 20	100KHz/0.25V	0.480	1.30
CDL137-271K	270	± 20	100KHz/0.25V	0.520	1.20
CDL137-331K	330	± 20	100KHz/0.25V	0.650	1.10
CDL137-391K	390	± 20	100KHz/0.25V	0.800	1.00
CDL137-471K	470	± 20	100KHz/0.25V	1.100	0.90
CDL137-561K	560	± 20	100KHz/0.25V	1.150	0.85
CDL137-681K	680	± 20	100KHz/0.25V	1.600	0.75
CDL137-821K	820	± 20	100KHz/0.25V	1.700	0.65

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司
深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221
网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818