
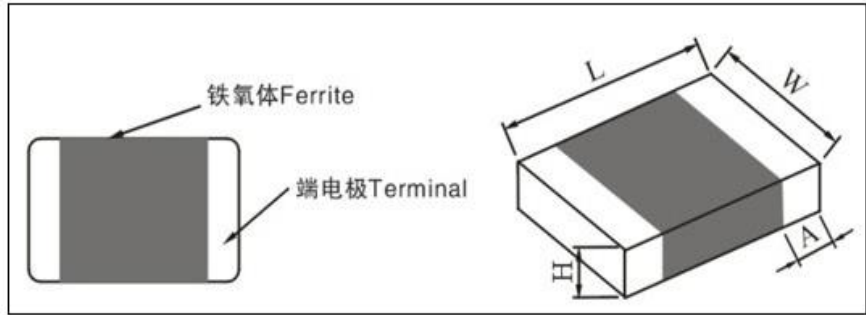


产品名称 Product name: CFB 铁氧体贴片磁珠 CFB ferrite chip magnet www.anruike.com

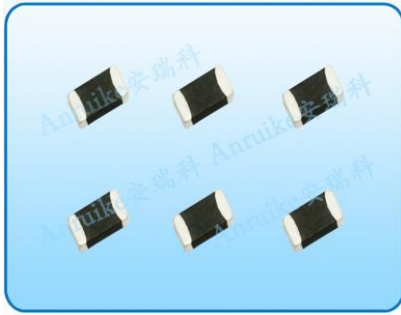

外型及尺寸 Shape and size (单位: mm) www.anruike.com Tel:0755-29805463

型号 Type	L(长)	W(宽)	H(高)	A(端电极)	最小包装(PCS)
CFB1005(0402)	1.0±0.15	0.5±0.15	0.5±0.15	0.25±0.1	10000
CFB1608(0603)	1.6±0.15	0.8±0.15	0.8±0.15	0.3±0.2	4000
CFB2012(0805)	2.0±0.2	1.25±0.2	0.85±0.2	0.5±0.3	3000
CFB3216(1206)	3.2±0.2	1.6±0.2	0.85±0.2	0.5±0.3	2000
CFB3225(1210)	3.2±0.2	2.5±0.2	1.3±0.3	0.5±0.3	2000
CFB4516(1806)	4.5±0.2	1.6±0.2	1.6±0.3	0.5±0.3	1000
CFB4532(1812)	4.5±0.2	3.2±0.2	1.6±0.3	0.5±0.3	1000

命名说明 Name Description www.anruike.com Tel:0755-29805463

- ◆ CFB 表示产品类型铁氧体贴片磁珠。CFB indicates that the product type is ferrite chip magnet.
- ◆ 1608 表示产品尺寸,如 16 表示长为 1.6MM,08 表示宽为 0.8MM。1608 indicates product size, for example, 16 is 1.6MM and 08 is 0.8MM.

特征性能及应用 Characteristics and application of

- ◆ 使用载带包装运用于 SMT。The use of tape pack is applied to SMT.
- ◆ 在较宽的频率范围内有优良的抑制 EMI 性能。It has excellent suppression of EMI performance in a wide frequency range.
- ◆ 有优良的焊接性能。It has excellent protective performance.
- ◆ 适用于回流焊 SMT 工艺。It is suitable for reflow soldering SMT process.
- ◆ 无铅产品,符合 RoHS 指令。The lead free products comply with the RoHS directive.
- ◆ 广泛应用于电脑及周边设备,VCR、VCD、照相机、办公设备、等多类电子数字信号的波型接口部位的控制。It is widely used in computer and peripheral equipment, VCR, VCD, camera, office equipment, and other electronic and digital signal waveform interface control.

测量仪表及条件 Measuring instrument and conditions

- ◆ 电感值测试仪表: HP4286A\CH1062A 或同等 LCR METER.
- ◆ 测试条件: 100MHZ.
- ◆ 电阻测试仪: TH2512B 或同等的 DCR 测试设备.
- ◆ 额定电流测试仪: VR116&VR7210 或同等恒流源设备.
- ◆ 额定电流定义: 电感下降 25%或温度上升 40℃时取其最小值作为额定电流.
- ◆ 贮藏温度: 10℃~25.
- ◆ 相对湿度: 65%~85%.

深圳市安瑞科电子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com

电气参数 Electrical parameters **CFB1005(0402)** Series www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB1005-060	<6	100	0.05	500
CFB1005-100	10	100	0.05	500
CFB1005-150	15	100	0.05	500
CFB1005-220	22	100	0.10	300
CFB1005-300	30	100	0.20	300
CFB1005-470	47	100	0.30	300
CFB1005-600	60	100	0.30	200
CFB1005-800	80	100	0.35	200
CFB1005-101	100	100	0.45	150
CFB1005-151	150	100	0.50	150
CFB1005-221	220	100	0.65	100
CFB1005-331	330	100	0.80	100
CFB1005-471	470	100	1.00	50
CFB1005-601	600	100	1.20	50
CFB1005-801	800	100	1.50	50
CFB1005-102	1000	100	1.60	50

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科电子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221
<http://www.anruike.com> E-mail: ark@anruike.com

电气参数 Electrical parameters **CFB1608(0603)** Series www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB1608-000	<10	100	0.05	800
CFB1608-110	11	100	0.05	800
CFB1608-190	19	100	0.10	500
CFB1608-310	31	100	0.10	500
CFB1608-600	60	100	0.10	500
CFB1608-800	80	100	0.15	400
CFB1608-121	120	100	0.20	300
CFB1608-151	150	100	0.20	300
CFB1608-181	180	100	0.30	300
CFB1608-221	220	100	0.30	300

CFB1608-301	300	100	0.35	200
CFB1608-501	500	100	0.45	200
CFB1608-601	600	100	0.45	200
CFB1608-751	750	100	0.50	200
CFB1608-102	1000	100	0.60	150
CFB1608-152	1500	100	0.70	150
CFB1608-202	2000	100	1.00	150

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科电子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com

Anruike 安瑞科 铁氧体贴片磁珠 ferrite chip magnet CFB 型

电气参数 Electrical parameters **CFB2012(0805) Series** www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB2012-000	<10	100	0.10	800
CFB2012-110	11	100	0.10	800
CFB2012-190	19	100	0.10	800
CFB2012-260	26	100	0.10	800
CFB2012-310	31	100	0.10	800
CFB2012-360	36	100	0.10	800
CFB2012-600	60	100	0.10	800
CFB2012-700	70	100	0.10	800
CFB2012-800	80	100	0.10	800
CFB2012-121	120	100	0.15	600
CFB2012-151	150	100	0.15	600
CFB2012-181	180	100	0.18	600
CFB2012-221	220	100	0.20	500
CFB2012-301	300	100	0.20	500
CFB2012-501	500	100	0.30	400
CFB2012-601	600	100	0.30	400
CFB2012-751	750	100	0.35	300
CFB2012-102	1000	100	0.35	300
CFB2012-152	1500	100	0.40	200
CFB2012-252	2500	100	1.00	100

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科电子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com

电气参数 Electrical parameters **CFB3216(1206) Series** www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB3216-000	<10	100	0.10	1000
CFB3216-110	11	100	0.10	1000
CFB3216-190	19	100	0.10	1000
CFB3216-260	26	100	0.10	1000
CFB3216-310	31	100	0.10	1000
CFB3216-360	36	100	0.10	1000
CFB3216-600	60	100	0.10	1000
CFB3216-700	70	100	0.10	1000
CFB3216-800	80	100	0.10	1000
CFB3216-121	120	100	0.10	1000
CFB3216-151	150	100	0.15	800
CFB3216-181	180	100	0.15	800
CFB3216-301	300	100	0.20	600
CFB3216-501	500	100	0.30	600
CFB3216-601	600	100	0.30	600
CFB3216-751	750	100	0.50	500
CFB3216-102	1000	100	0.60	500
CFB3216-152	1500	100	0.70	300
CFB3216-202	2000	100	0.85	200
CFB3216-252	2500	100	1.00	100

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科电子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com

电气参数 Electrical parameters **CFB3225(1210) Series** www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB3225-310	31	100	0.10	1000
CFB3225-500	50	100	0.10	1000
CFB3225-600	60	100	0.10	1000
CFB3225-700	70	100	0.10	1000
CFB3225-800	80	100	0.10	1000
CFB3225-101	100	100	0.10	

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科電子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221
<http://www.anruike.com> E-mail: ark@anruike.com

Anruike 安瑞科 铁氧体贴片磁珠 ferrite chip magnet CFB 型

电气参数 Electrical parameters **CFB4516(1806) Series** www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB4516-500	50	100	0.10	1000
CFB4516-600	60	100	0.10	1000
CFB4516-700	70	100	0.10	1000
CFB4516-800	80	100	0.10	1000
CFB4516-900	90	100	0.10	1000
CFB4516-101	100	100	0.20	800
CFB4516-150	150	100	0.20	800

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科電子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221
<http://www.anruike.com> E-mail: ark@anruike.com

Anruike 安瑞科 铁氧体贴片磁珠 ferrite chip magnet CFB 型

电气参数 Electrical parameters **CFB4532(1812) Series** www.anruike.com

产品型号 Part NO	阻抗 (Ω) ±25% Impedance	测试频率 (MHz) Test frequency	直流电阻 (Ω) Max DC Resistance	额定电流 (mA) Max Rated Current
CFB4532-500	50	100	0.10	1000
CFB4532-600	60	100	0.10	1000
CFB4532-700	70	100	0.10	1000
CFB4532-800	80	100	0.10	1000
CFB4532-101	100	100	0.10	1000
CFB4532-121	120	100	0.20	800
CFB4532-151	150	100	0.20	800

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科電子有限公司 / 優質電感專業製造商Tel:0755-29805463,27994543 Fax:0755-29805221
<http://www.anruike.com> E-mail: ark@anruike.com