
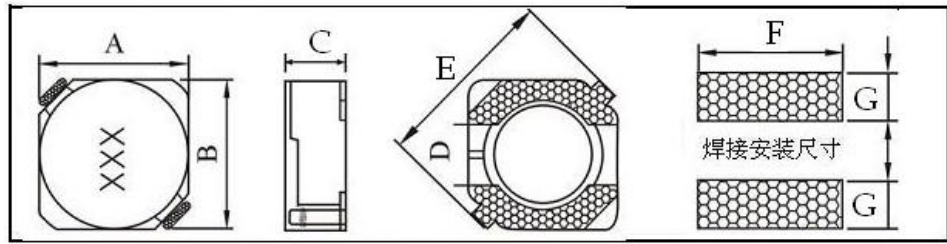


Anruike 安瑞科/SMD POWER INDUCTORS CD2D09 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B (±0.3)	C (max)	D	E	F	G	载带盘装
CD2D09	3.3	3.3	1.1	1.0	4.5	3.5	1.3	4000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD2D09-1R0N	1.0	±30	100KHz/0.25V	0.08	0.88
CD2D09-1R2N	1.2	±30	100KHz/0.25V	0.09	0.80
CD2D09-1R5N	1.5	±30	100KHz/0.25V	0.11	0.73
CD2D09-1R8N	1.8	±30	100KHz/0.25V	0.13	0.65
CD2D09-2R2N	2.2	±30	100KHz/0.25V	0.14	0.60
CD2D09-2R7N	2.7	±30	100KHz/0.25V	0.15	0.53
CD2D09-3R3N	3.3	±30	100KHz/0.25V	0.18	0.47
CD2D09-3R9N	3.9	±30	100KHz/0.25V	0.22	0.45
CD2D09-4R7N	4.7	±30	100KHz/0.25V	0.28	0.41
CD2D09-5R6N	5.6	±30	100KHz/0.25V	0.32	0.37
CD2D09-6R8N	6.8	±30	100KHz/0.25V	0.42	0.33
CD2D09-8R2N	8.2	±30	100KHz/0.25V	0.47	0.30
CD2D09-100M	10	±20	100KHz/0.25V	0.53	0.28
CD2D09-120M	12	±20	100KHz/0.25V	0.55	0.26
CD2D09-150M	15	±20	100KHz/0.25V	0.58	0.25
CD2D09-180M	18	±20	100KHz/0.25V	0.60	0.23
CD2D09-220M	22	±20	100KHz/0.25V	0.63	0.20
CD2D09-270M	27	±20	100KHz/0.25V	0.65	0.18
CD2D09-330M	33	±20	100KHz/0.25V	0.68	0.15
CD2D09-390M	39	±20	100KHz/0.25V	0.71	0.14
CD2D09-470M	47	±20	100KHz/0.25V	0.73	0.12
CD2D09-560M	56	±20	100KHz/0.25V	0.75	0.10

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818