
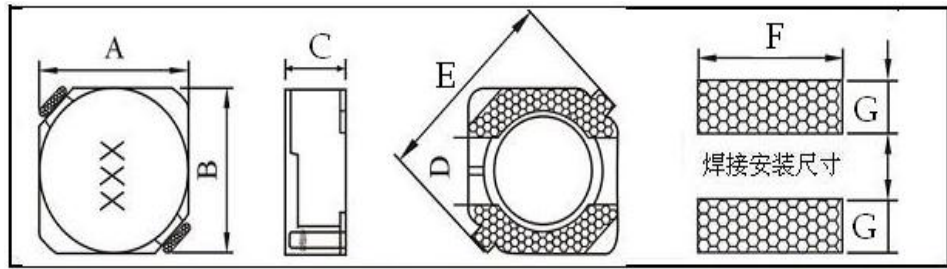


# Anruike 安瑞科/SMD POWER INDUCTORS **CD2D11** SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B ( $\pm 0.3$ )	C (max)	D	E	F	G	载带盘装
CD2D11	3.3	3.3	1.3	1.0	4.5	3.5	1.3	4000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CD2D11-1R0N	1.0	$\pm 30$	100KHz/0.25V	0.04	1.00
CD2D11-1R2N	1.2	$\pm 30$	100KHz/0.25V	0.05	0.95
CD2D11-1R5N	1.5	$\pm 30$	100KHz/0.25V	0.06	0.90
CD2D11-2R2N	2.2	$\pm 30$	100KHz/0.25V	0.09	0.78
CD2D11-3R3N	3.3	$\pm 30$	100KHz/0.25V	0.12	0.60
CD2D11-4R7N	4.7	$\pm 30$	100KHz/0.25V	0.17	0.50
CD2D11-6R8N	6.8	$\pm 30$	100KHz/0.25V	0.26	0.44
CD2D11-8R2N	8.2	$\pm 30$	100KHz/0.25V	0.30	0.40
CD2D11-100M	10	$\pm 20$	100KHz/0.25V	0.40	0.35
CD2D11-120M	12	$\pm 20$	100KHz/0.25V	0.38	0.33
CD2D11-150M	15	$\pm 20$	100KHz/0.25V	0.36	0.32
CD2D11-180M	18	$\pm 20$	100KHz/0.25V	0.32	0.30
CD2D11-220M	22	$\pm 20$	100KHz/0.25V	0.30	0.28
CD2D11-270M	27	$\pm 20$	100KHz/0.25V	0.27	0.25
CD2D11-330M	33	$\pm 20$	100KHz/0.25V	0.23	0.21
CD2D11-390M	39	$\pm 20$	100KHz/0.25V	0.20	0.18
CD2D11-470M	47	$\pm 20$	100KHz/0.25V	0.19	0.15
CD2D11-560M	56	$\pm 20$	100KHz/0.25V	0.18	0.14
CD2D11-680M	68	$\pm 20$	100KHz/0.25V	0.17	0.13
CD2D11-820M	82	$\pm 20$	100KHz/0.25V	0.16	0.12
CD2D11-101M	100	$\pm 20$	100KHz/0.25V	0.15	0.11

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818