
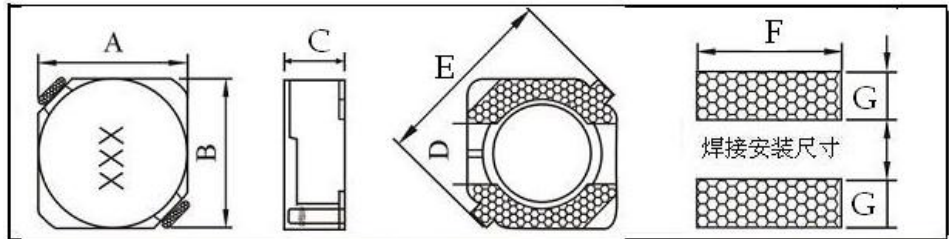


# Anruike 安瑞科/SMD POWER INDUCTORS CD3D16 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B(±0.3)	C (max)	D	E	F	G	载带盘装
CD3D16	4.0	4.0	1.8	1.5	5.5	4.2	1.5	3000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD3D16-1R5N	1.5	±30	100KHz/0.25V	0.05	2.8
CD3D16-2R2N	2.2	±30	100KHz/0.25V	0.09	2.3
CD3D16-3R3N	3.3	±30	100KHz/0.25V	0.09	1.9
CD3D16-4R7N	4.7	±30	100KHz/0.25V	0.10	1.50
CD3D16-6R8N	6.8	±30	100KHz/0.25V	0.17	1.33
CD3D16-100M	10	±20	100KHz/0.25V	0.27	1.05
CD3D16-120M	12	±20	100KHz/0.25V	0.3	0.95
CD3D16150M	15	±20	100KHz/0.25V	0.29	1.00
CD3D16-180M	18	±20	100KHz/0.25V	0.35	0.91
CD3D16-220M	22	±20	100KHz/0.25V	0.46	0.7
CD3D16-270M	27	±20	100KHz/0.25V	0.54	0.68
CD3D16-330M	33	±20	100KHz/0.25V	0.67	0.62
CD3D16-390M	39	±20	100KHz/0.25V	0.69	0.58
CD3D16-470M	47	±20	100KHz/0.25V	1.10	0.45
CD3D16-560M	56	±20	100KHz/0.25V	1.25	0.4
CD3D16-680M	68	±20	100KHz/0.25V	1.51	0.38
CD3D16-820M	82	±20	100KHz/0.25V	1.7	0.35
CD3D16-101M	100	±20	100KHz/0.25V	2.0	0.33
CD3D16-121M	120	±20	100KHz/0.25V	2.5	0.3
CD3D16-151M	150	±20	100KHz/0.25V	3.6	0.28
CD3D16-181M	180	±20	100KHz/0.25V	5.6	0.2

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818