
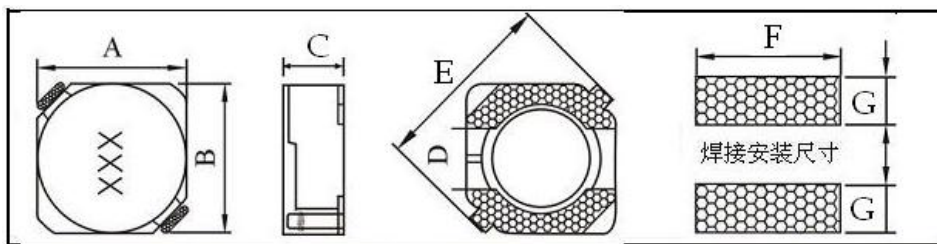


Anruike 安瑞科/SMD POWER INDUCTORS **CD3D28** SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B (±0.3)	C (max)	D	E	F	G	载带盘装
CD3D28	4.0	4.0	3.0	1.5	5.5	4.2	1.5	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD3D28-100M	10	±20	100KHz/0.25V	0.13	1.25
CD3D28-120M	12	±20	100KHz/0.25V	0.24	1.2
CD3D28-150M	15	±20	100KHz/0.25V	0.28	1.1
CD3D28-180M	18	±20	100KHz/0.25V	0.29	1.0
CD3D28-220M	22	±20	100KHz/0.25V	0.3	0.87
CD3D28-270M	27	±20	100KHz/0.25V	0.37	0.79
CD3D28-330M	33	±20	100KHz/0.25V	0.41	0.68
CD3D28-390M	39	±20	100KHz/0.25V	0.52	0.65
CD3D28-470M	47	±20	100KHz/0.25V	0.6	0.55
CD3D28-560M	56	±20	100KHz/0.25V	0.85	0.50
CD3D28-680M	68	±20	100KHz/0.25V	0.87	0.48
CD3D28-820M	82	±20	100KHz/0.25V	0.93	0.47
CD3D28-101M	100	±20	100KHz/0.25V	1.4	0.43
CD3D28-121M	120	±20	100KHz/0.25V	1.75	0.33
CD3D28-151M	150	±20	100KHz/0.25V	1.88	0.32
CD3D28-181M	180	±20	100KHz/0.25V	2.13	0.3
CD3D28-221M	220	±20	100KHz/0.25V	2.6	0.29
CD3D28-331M	330	±20	100KHz/0.25V	3.0	0.19
CD3D28-391M	390	±20	100KHz/0.25V	3.9	0.18
CD3D28-471M	470	±20	100KHz/0.25V	5.1	0.19

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818