
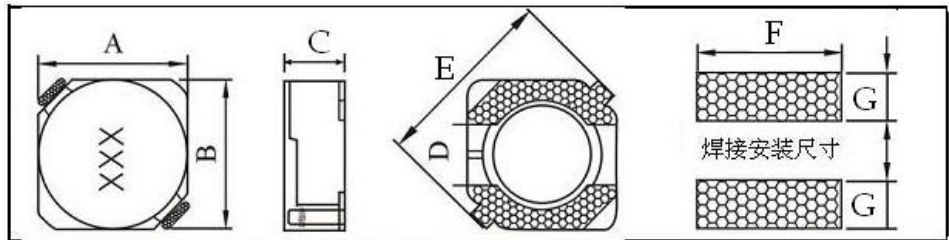


Anruike 安瑞科/SMD POWER INDUCTORS CD4D28 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B (±0.3)	C (max)	D	E	F	G	载带盘装
CD4D28	5.0	5.0	3.0	1.5	6.9	5.3	1.9	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD4D28-1R0N	1.0	±30	100KHz/0.25V	0.018	4.0
CD4D28-1R5N	1.5	±30	100KHz/0.25V	0.02	3.2
CD4D28-2R2M	2.2	±20	100KHz/0.25V	0.025	2.8
CD4D28-4R7M	4.7	±20	100KHz/0.25V	0.04	2.0
CD4D28-5R6M	5.6	±20	100KHz/0.25V	0.05	1.60
CD4D28-8R2M	8.2	±20	100KHz/0.25V	0.06	1.45
CD4D28-100M	10	±20	100KHz/0.25V	0.07	1.35
CD4D28-150M	15	±20	100KHz/0.25V	0.11	1.0
CD4D28-220M	22	±20	100KHz/0.25V	0.16	0.85
CD4D28-330M	33	±20	100KHz/0.25V	0.21	0.72
CD4D28-470M	47	±20	100KHz/0.25V	0.29	0.59
CD4D28-560M	56	±20	100KHz/0.25V	0.38	0.54
CD4D28-680M	68	±20	100KHz/0.25V	0.70	0.45
CD4D28-820M	82	±20	100KHz/0.25V	0.81	0.40
CD4D28-101M	100	±20	100KHz/0.25V	0.95	0.35
CD4D28-151M	150	±20	100KHz/0.25V	1.10	0.30
CD4D28-221M	220	±20	100KHz/0.25V	1.38	0.28
CD4D28-202M	2000	±20	100KHz/0.25V	16.9	0.09

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818