
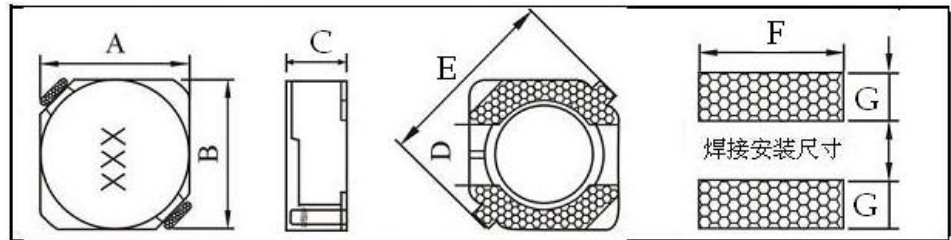


# Anruike 安瑞科/SMD POWER INDUCTORS CD5D18 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B(±0.3)	C (max)	D	E	F	G	载带盘装
CD5D18	6.0	6.0	2.0	2.0	8.2	6.3	2.15	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD5D18-1R5N	1.5	±30	100KHz/0.25V	0.02	2.7
CD5D18-2R2N	2.2	±30	100KHz/0.25V	0.035	2.6
CD5D18-3R3N	3.3	±30	100KHz/0.25V	0.05	2.0
CD5D18-4R7N	4.7	±30	100KHz/0.25V	0.06	1.8
CD5D18-5R6N	5.6	±30	100KHz/0.25V	0.088	2.20
CD5D18-6R8N	6.8	±30	100KHz/0.25V	0.091	2.12
CD5D18-8R2N	8.2	±30	100KHz/0.25V	0.115	2.00
CD5D18-100M	10	±20	100KHz/0.25V	0.1	1.2
CD5D18-120M	12	±20	100KHz/0.25V	0.153	1.70
CD5D18-150M	15	±20	100KHz/0.25V	0.196	1.30
CD5D18-180M	18	±20	100KHz/0.25V	0.210	1.05
CD5D18-220M	22	±20	100KHz/0.25V	0.22	0.7
CD5D18-270M	27	±20	100KHz/0.25V	0.330	0.75
CD5D18-330M	33	±20	100KHz/0.25V	0.32	0.55
CD5D18-390M	39	±20	100KHz/0.25V	0.520	0.19
CD5D18-470M	47	±20	100KHz/0.25V	0.595	0.64
CD5D18-560M	56	±20	100KHz/0.25V	0.665	0.60
CD5D18-680M	68	±20	100KHz/0.25V	0.840	0.53
CD5D18-820M	82	±20	100KHz/0.25V	0.978	0.51
CD5D18-101M	100	±20	100KHz/0.25V	0.9	0.32
CD5D18-151M	150	±20	100KHz/0.25V	1.900	0.40
CD5D18-221M	220	±20	100KHz/0.25V	2.140	0.30
CD5D18-271M	270	±20	100KHz/0.25V	2.780	0.28
CD5D18-331M	330	±20	100KHz/0.25V	2.7	0.19
CD5D18-391M	390	±20	100KHz/0.25V	3.650	0.20
CD5D18-471M	470	±20	100KHz/0.25V	4.0	0.17

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818