


Anruike 安瑞科/SMD POWER INDUCTORS CD6D28 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

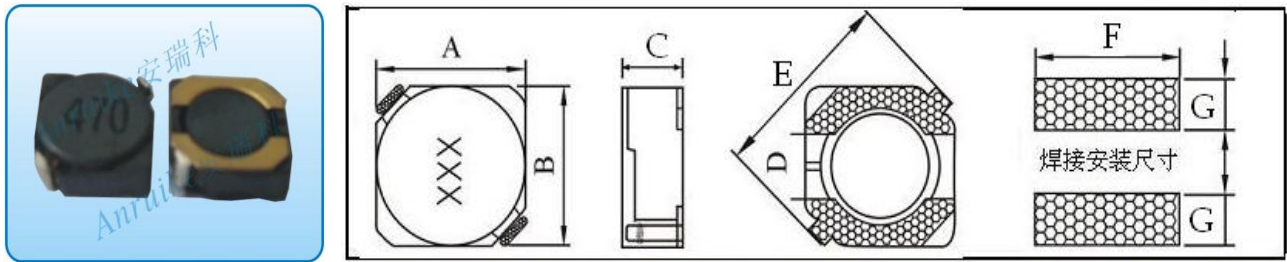

产品型号	A (max)	B (± 0.3)	C (max)	D	E	F	G	载带盘装
CD6D28	7.0	7.0	3.0	2.0	9.5	7.3	2.65	1500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD6D28-1R5N	1.5	± 30	100KHz/0.25V	0.015	6.7
CD6D28-3R3N	3.3	± 30	100KHz/0.25V	0.028	4.0
CD6D28-3R9N	3.9	± 30	100KHz/0.25V	0.030	3.8
CD6D28-4R7N	4.7	± 30	100KHz/0.25V	0.036	3.6
CD6D28-6R0N	6.0	± 30	100KHz/0.25V	0.040	2.81
CD6D28-7R3N	7.3	± 30	100KHz/0.25V	0.054	2.72
CD6D28-8R2N	8.2	± 30	100KHz/0.25V	0.056	2.60
CD6D28-100M	10	± 20	100KHz/0.25V	0.06	2.4
CD6D28-120M	12	± 20	100KHz/0.25V	0.072	2.20
CD6D28-150M	15	± 20	100KHz/0.25V	0.084	1.80
CD6D28-180M	18	± 20	100KHz/0.25V	0.095	1.72
CD6D28-220M	22	± 20	100KHz/0.25V	0.13	1.60
CD6D28-270M	27	± 20	100KHz/0.25V	0.16	1.45
CD6D28-330M	33	± 20	100KHz/0.25V	0.2	1.30
CD6D28-390M	39	± 20	100KHz/0.25V	0.210	1.2
CD6D28-470M	47	± 20	100KHz/0.25V	0.25	1.1
CD6D28-560M	56	± 20	100KHz/0.25V	0.287	1.0
CD6D28-680M	68	± 20	100KHz/0.25V	0.304	0.85
CD6D28-820M	82	± 20	100KHz/0.25V	0.390	0.80
CD6D28-101M	100	± 20	100KHz/0.25V	0.51	0.75
CD6D28-151M	150	± 20	100KHz/0.25V	0.85	0.60
CD6D28-221M	220	± 20	100KHz/0.25V	1.2	0.5
CD6D28-271M	270	± 20	100KHz/0.25V	1.35	0.42
CD6D28-331M	330	± 20	100KHz/0.25V	2.0	0.38
CD6D28-391M	390	± 20	100KHz/0.25V	2.350	0.36
CD6D28-471M	470	± 20	100KHz/0.25V	2.500	0.32
CD6D28-561M	560	± 20	100KHz/0.25V	2.800	0.28
CD6D28-102M	1000	± 20	100KHz/0.25V	5.7	0.25

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ: 1193940818