


Anruike 安瑞科/SMD POWER INDUCTORS CD6D38 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

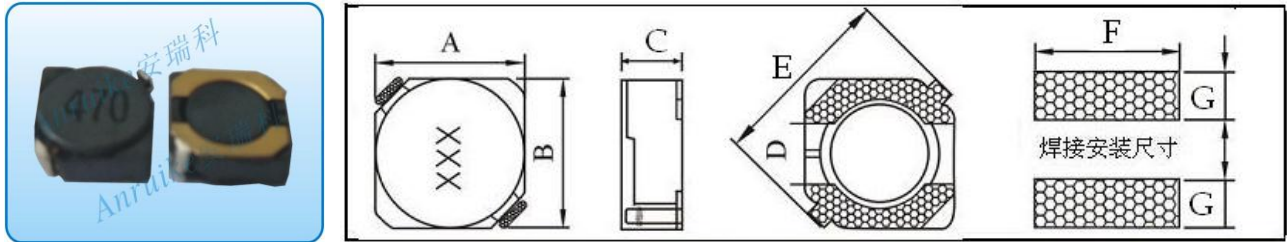

产品型号	A (max)	B (± 0.3)	C (max)	D	E	F	G	载带盘装
CD6D38	7.0	7.0	4.0	2.0	9.5	7.3	2.65	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (μH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD6D38-1R5N	1.5	± 30	100KHz/0.25V	0.015	3.8
CD6D38-3R3N	3.3	± 30	100KHz/0.25V	0.02	3.6
CD6D38-4R7N	4.7	± 30	100KHz/0.25V	0.021	3.0
CD6D38-5R0N	5.0	± 30	100KHz/0.25V	0.025	2.5
CD6D38-100M	10	± 20	100KHz/0.25V	0.05	2.00
CD6D38-120M	12	± 20	100KHz/0.25V	0.06	1.55
CD6D38-150M	15	± 20	100KHz/0.25V	0.07	1.80
CD6D38-180M	18	± 20	100KHz/0.25V	0.75	1.72
CD6D38-220M	22	± 20	100KHz/0.25V	0.08	1.4
CD6D38-270M	27	± 20	100KHz/0.25V	0.09	1.3
CD6D38-330M	33	± 20	100KHz/0.25V	0.11	1.2
CD6D38-390M	39	± 20	100KHz/0.25V	0.13	1.1
CD6D38-470M	47	± 20	100KHz/0.25V	0.15	1.00
CD6D38-560M	56	± 20	100KHz/0.25V	0.18	0.87
CD6D38-680M	68	± 20	100KHz/0.25V	0.21	0.80
CD6D38-820M	82	± 20	100KHz/0.25V	0.30	0.70
CD6D38-101M	100	± 20	100KHz/0.25V	0.40	0.65
CD6D38-121M	120	± 20	100KHz/0.25V	0.44	0.59
CD6D38-151M	150	± 20	100KHz/0.25V	0.46	0.55
CD6D38-181M	180	± 20	100KHz/0.25V	0.53	0.49
CD6D38-221M	220	± 20	100KHz/0.25V	0.66	0.45
CD6D38-271M	270	± 20	100KHz/0.25V	1.02	0.40
CD6D38-331M	330	± 20	100KHz/0.25V	1.07	0.38
CD6D38-391M	390	± 20	100KHz/0.25V	1.25	0.34
CD6D38-471M	470	± 20	100KHz/0.25V	2.00	0.32
CD6D38-561M	560	± 20	100KHz/0.25V	2.35	0.29
CD6D38-102M	1000	± 20	100KHz/0.25V	4.0	0.20
CD6D38-152M	1500	± 20	100KHz/0.25V	4.4	0.17

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818