
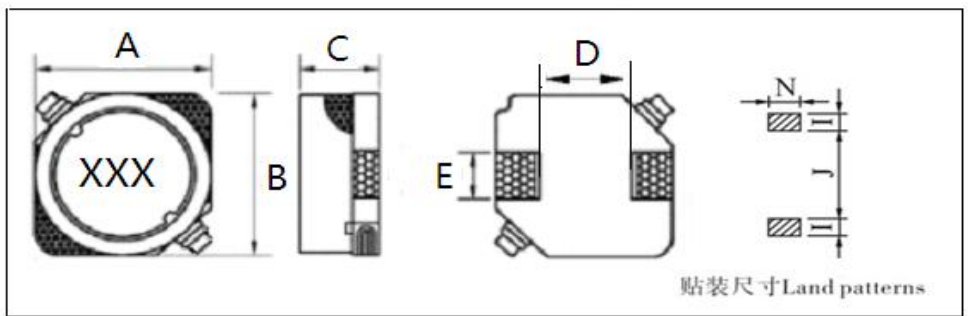


# Anruike 安瑞科 / SMD POWER INDUCTORS ADBL1030 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

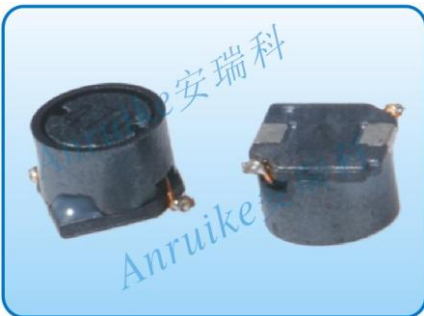

产品型号 Part NO	A	B	C	D	E	N	I	J	载带盘装 Carrying dish
ADBL1030	10.0±0.3	10.0±0.3	3.0±0.3	6.0	3.2	3.2	2.5	5.6	500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号 Part NO	电感量 (uH) Inductance	测试频率 TestCondition	直流电阻(Ω)±20% DC Resistance	额定电流 Rated current IDC (A) Max	温升电流 Heat Rated Current
ADBL1030-100M	10	100KHz/0.25V	0.07	2.00	2.5
ADBL1030-120M	12	100KHz/0.25V	0.07	1.90	2.3
ADBL1030-150M	15	100KHz/0.25V	0.08	1.70	2.0
ADBL1030-220M	22	100KHz/0.25V	0.12	1.30	1.7
ADBL1030-270M	27	100KHz/0.25V	0.15	1.15	1.5
ADBL1030-330M	33	100KHz/0.25V	0.21	1.10	1.5
ADBL1030-470M	47	100KHz/0.25V	0.30	0.85	1.20
ADBL1030-680M	68	100KHz/0.25V	0.58	0.75	1.0
ADBL1030-101M	100	100KHz/0.25V	0.67	0.60	0.90
ADBL1030-151M	150	100KHz/0.25V	0.79	0.50	0.84
ADBL1030-221M	220	100KHz/0.25V	1.35	0.40	0.80
ADBL1030-331M	330	100KHz/0.25V	2.00	0.32	0.68
ADBL1030-471M	470	100KHz/0.25V	3.50	0.28	0.50
ADBL1030-681M	680	100KHz/0.25V	4.10	0.22	0.40
ADBL1030-102M	1000	100KHz/0.25V	5.10	0.18	0.35

K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

注：本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: [ark@anruike.com](mailto:ark@anruike.com)