


Anruike 安瑞科/ SMD POWER INDUCTORS ADBL1265 SERIES

外型及尺寸 (单位 : mm) Shape and size (unit: mm) Anruike/安瑞科

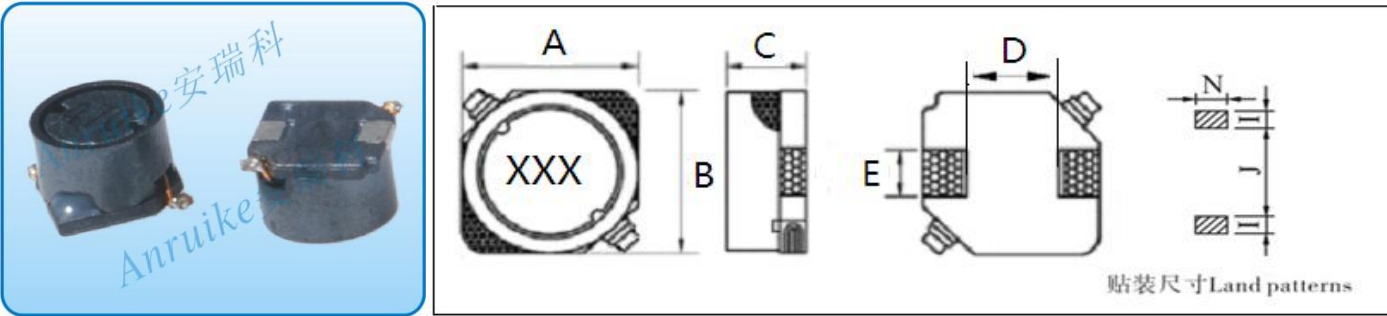

产品型号 Part NO	A	B	C	D	E	N	I	J	载带盘装 Carrying dish
ADBL1265	12.0±0.3	12.0±0.3	6.5±0.3	8.6	3.2	3.2	2.5	8.6	500PCS/R

电气参数:Electrical parameters: Anruike/安瑞科

产品型号 Part NO	电感量 (uH) Inductance	测试频率 TestCondition	直流电阻 (Ω)±20% DC Resistance	额定电流 Rated current IDC (A) Max	温升电流 Heat Rated Current
ADBL1265-3R3M	3.3	100KHz/0.25V	0.013	7.60	9.5
ADBL1265-5R6M	5.6	100KHz/0.25V	0.017	6.00	8.4
ADBL1265-7R0M	7.0	100KHz/0.25V	0.018	5.70	7.5
ADBL1265-100M	10	100KHz/0.25V	0.020	5.50	7.0
ADLB1265-120M	12	100KHz/0.25V	0.022	5.00	6.7
ADBL1265-150M	15	100KHz/0.25V	0.025	4.20	6.5
ADBL1265-220M	22	100KHz/0.25V	0.032	3.50	5.4
ADBL1265-270M	27	100KHz/0.25V	0.038	3.10	5.0
ADBL1265-330M	33	100KHz/0.25V	0.041	2.80	4.8
ADBL1265-390M	39	100KHz/0.25V	0.047	2.60	4.2
ADBL1265-470M	47	100KHz/0.25V	0.058	2.40	3.7
ADBL1265-560M	56	100KHz/0.25V	0.063	2.30	3.1
ADBL1265-680M	68	100KHz/0.25V	0.079	2.20	2.8
ADBL1265-101M	100	100KHz/0.25V	0.123	1.60	2.4
ADBL1265-151M	150	100KHz/0.25V	0.273	1.00	1.8

K 表示电感值的公差为±10% , M 表示电感值的公差为±20% , N 表示电感值的公差为±30%。
K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

注：本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。
Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.