
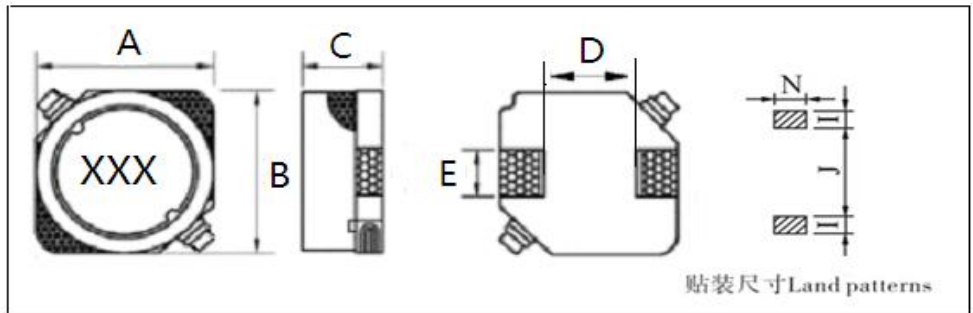


# Anruike 安瑞科 / SMD POWER INDUCTORS ADBL7032 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

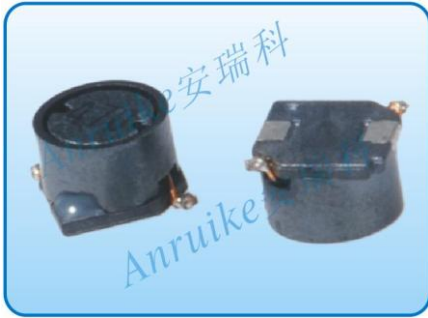

产品型号 Part NO	A	B	C	D	E	N	I	J	载带盘装 Carrying dish
ADBL7032	7.0±0.2	7.0±0.2	3.2±0.2	4.0	2.0	2.2	2.0	4.0	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号 Part NO	电感量 (uH) Inductance	测试频率 TestCondition	直流电阻(Ω)±20% DC Resistance	额定电流 Rated current IDC (A) Max	温升电流 Heat Rated Current
ADBL7032-3R3M	3.3	100KHz/0.25V	0.023	1.80	2.3
ADBL7032-3R9M	3.9	100KHz/0.25V	0.028	1.70	2.1
ADBL7032-4R7M	4.7	100KHz/0.25V	0.036	1.65	1.9
ADBL7032-5R6M	5.6	100KHz/0.25V	0.049	1.60	1.8
ADBL7032-6R8M	6.8	100KHz/0.25V	0.040	1.50	1.6
ADB7032-100M	10	100KHz/0.25V	0.050	1.30	1.5
ADBL7032-120M	12	100KHz/0.25V	0.060	1.20	1.4
ADBL7032-150M	15	100KHz/0.25V	0.080	1.00	1.2
ADBL7032-220M	22	100KHz/0.25V	0.110	0.86	1.1
ADBL7032-270M	27	100KHz/0.25V	0.120	0.80	1.0
ADBL7032-330M	33	100KHz/0.25V	0.160	0.65	0.9
ADBL7032-390M	39	100KHz/0.25V	0.180	0.60	0.8
ADBL7032-470M	47	100KHz/0.25V	0.240	0.57	0.7
ADBL7032-680M	68	100KHz/0.25V	0.310	0.49	0.6
ADBL7032-560M	56	100KHz/0.25V	0.390	0.40	0.5
ADBL7032-101M	100	100KHz/0.25V	0.450	0.35	0.4

K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

注：本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.