


Anruike 安瑞科/SMD POWER INDUCTORS CDBL7045 SERIES

外型及尺寸 (单位 : mm) Shape and size (unit: mm) Anruike/安瑞科

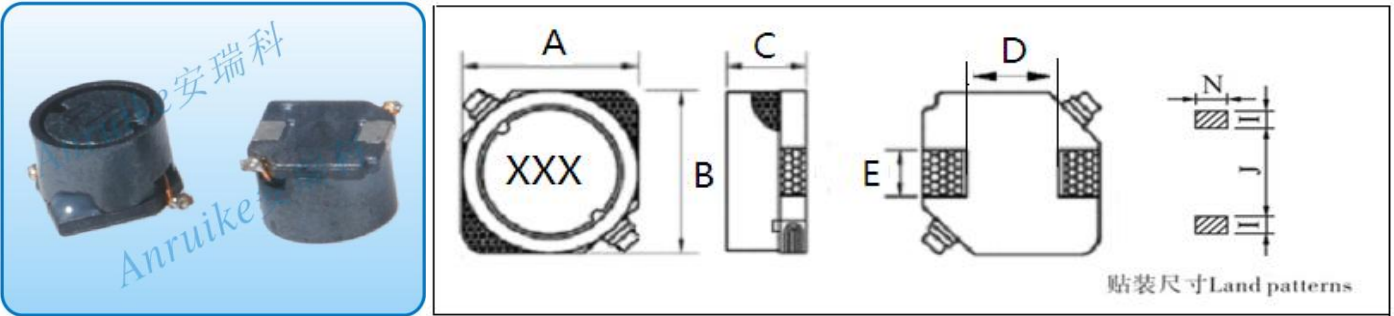

产品型号 Part NO	A	B	C	D	E	N	I	J	载带盘装 Carrying dish
ADBL7045	7.0±0.2	7.0±0.2	4.5±0.2	4.0	2.0	2.2	2.0	4.0	1000PCS/R

电气参数:Electrical parameters: Anruike/安瑞科

产品型号 Part NO	电感量 (uH) Inductance	测试频率 TestCondition	直流电阻(Ω)±20% DC Resistance	额定电流 Rated current IDC (A) Max	温升电流 Heat Rated Current
ADBL7045-3R3M	3.3	100KHz/0.25V	0.02	2.3	2.5
ADBL7045-4R7M	4.7	100KHz/0.25V	0.03	2.0	2.3
ADBL7045-6R8M	6.8	100KHz/0.25V	0.04	1.7	2.0
ADBL7045-100M	10	100KHz/0.25V	0.04	1.3	1.8
ADBL7045-120M	12	100KHz/0.25V	0.05	1.2	1.7
ADBL7045-150M	15	100KHz/0.25V	0.05	1.1	1.6
ADBL7045-220M	22	100KHz/0.25V	0.06	0.9	1.4
ADBL7045-270M	27	100KHz/0.25V	0.08	0.83	1.2
ADBL7045-330M	33	100KHz/0.25V	0.10	0.82	1.1
ADBL7045-390M	39	100KHz/0.25V	0.12	0.79	1.0
ADBL7045-470M	47	100KHz/0.25V	0.13	0.75	1.92
ADBL7045-680M	68	100KHz/0.25V	0.18	0.60	0.78
ADBL7045-101M	100	100KHz/0.25V	0.25	0.50	0.64
ADBL7045-151M	150	100KHz/0.25V	0.34	0.40	0.55
ADBL7045-221M	220	100KHz/0.25V	0.52	0.33	0.50

K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。
K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

注：本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。
Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.