


# Anruike 安瑞科/SMD POWER INDUCTORS **CD31** SERIES

外型及尺寸 Shape and size ( unit: mm )

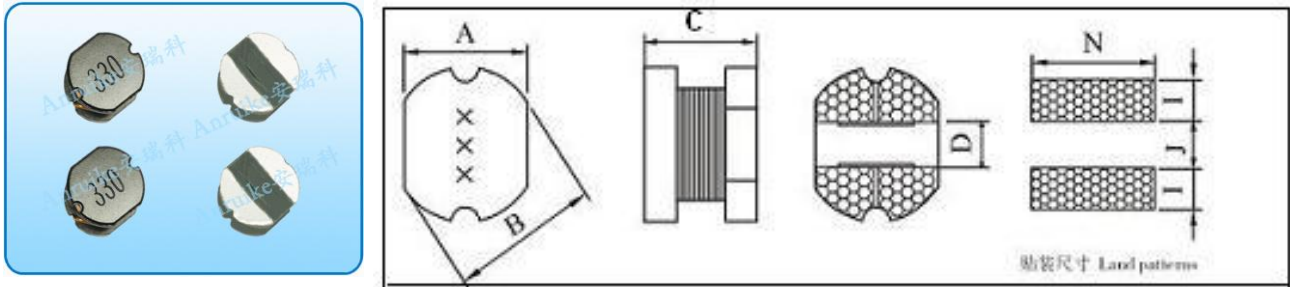

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	l	最小包装数数量
CD31	3.0	3.5	1.6	1.0	4.0	1.5	0.8	4000PCS/盘

电气参数 Electrical parameters

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD31-1R5M	1.5	±20	100KHz/0.25V	0.08	1.95
CD31-2R2M	2.2	±20	100KHz/0.25V	0.07	2.00
CD31-3R3M	3.3	±20	100KHz/0.25V	0.10	1.50
CD31-3R9M	3.9	±20	100KHz/0.25V	0.11	1.45
CD31-4R7M	4.7	±20	100KHz/0.25V	0.13	1.40
CD31-5R6M	5.6	±20	100KHz/0.25V	0.18	1.20
CD31-6R8M	6.8	±20	100KHz/0.25V	0.21	1.10
CD31-8R2M	8.2	±20	100KHz/0.25V	0.23	1.05
CD31-100K	10	±10	100KHz/0.25V	0.24	1.00
CD31-120K	12	±10	100KHz/0.25V	0.37	0.85
CD31-150K	15	±10	100KHz/0.25V	0.40	0.80
CD31-180K	18	±10	100KHz/0.25V	0.45	0.75
CD31-220K	22	±10	100KHz/0.25V	0.47	0.70
CD31-270K	27	±10	100KHz/0.25V	0.65	0.60
CD31-330K	33	±10	100KHz/0.25V	0.71	0.55
CD31-390K	39	±10	100KHz/0.25V	0.85	0.50
CD31-470K	47	±10	100KHz/0.25V	1.00	0.45
CD31-560K	56	±10	100KHz/0.25V	1.67	0.34
CD31-680K	68	±10	100KHz/0.25V	1.91	0.33
CD31-820K	82	±10	100KHz/0.25V	2.64	0.31
CD31-101K	100	±10	100KHz/0.25V	2.74	0.30
CD31-121K	120	±10	100KHz/0.25V	3.28	0.20
CD31-151K	150	±10	100KHz/0.25V	4.77	0.16
CD31-181K	180	±10	100KHz/0.25V	4.86	0.15
CD31-221K	220	±10	100KHz/0.25V	4.91	0.14

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818