


# Anruike 安瑞科 / SMD POWER INDUCTORS **CD52** SERIES

外型及尺寸 Shape and size ( unit: mm )

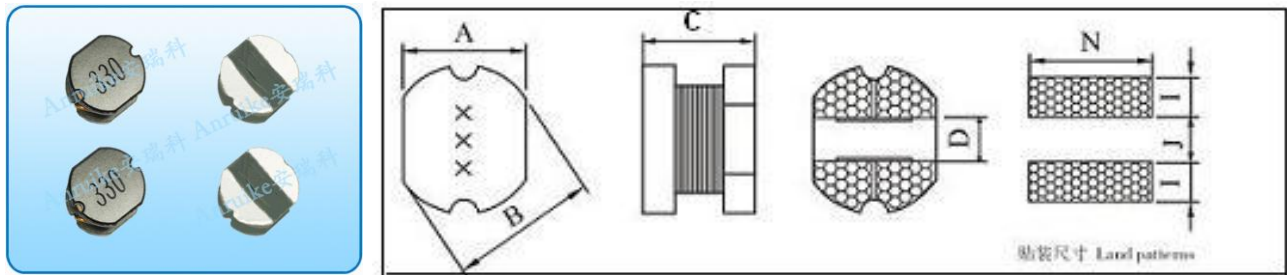

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	I	最小包装数量
CD52	5.2	5.8	2.5	1.6	5.5	2.5	1.2	2000PCS/盘

电气参数 Electrical parameters

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD52-2R2M	2.2	±20	100KHz/0.25V	0.045	4.20
CD52-2R7M	2.7	±20	100KHz/0.25V	0.050	4.08
CD52-3R3M	3.3	±20	100KHz/0.25V	0.052	3.90
CD52-3R9M	3.9	±20	100KHz/0.25V	0.05	3.84
CD52-4R7M	4.7	±20	100KHz/0.25V	0.06	3.60
CD52-5R6M	5.6	±20	100KHz/0.25V	0.07	3.60
CD52-6R8M	6.8	±20	100KHz/0.25V	0.09	3.36
CD52-8R2M	8.2	±20	100KHz/0.25V	0.10	2.60
CD52-100K	10	±10	100KHz/0.25V	0.13	2.00
CD52-120K	12	±10	100KHz/0.25V	0.14	1.85
CD52-220K	22	±10	100KHz/0.25V	0.23	1.65
CD52-270K	27	±10	100KHz/0.25V	0.32	1.56
CD52-330K	33	±10	100KHz/0.25V	0.35	1.50
CD52-390K	39	±10	100KHz/0.25V	0.43	1.24
CD52-470K	47	±10	100KHz/0.25V	0.54	1.10
CD52-560K	56	±10	100KHz/0.25V	0.62	1.05
CD52-680K	68	±10	100KHz/0.25V	0.75	0.94
CD52-820K	82	±10	100KHz/0.25V	0.80	0.83
CD52-101K	100	±10	100KHz/0.25V	0.86	0.79
CD52-181K	180	±10	100KHz/0.25V	0.90	0.63
CD52-221K	220	±10	100KHz/0.25V	1.44	0.61
CD52-271K	270	±10	100KHz/0.25V	1.73	0.59
CD52-391K	390	±10	100KHz/0.25V	1.78	0.48
CD52-471K	470	±10	100KHz/0.25V	2.00	0.37

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818