


# Anruike 安瑞科/SMD POWER INDUCTORS **CD75** SERIES

外型及尺寸 Shape and size ( unit: mm ) [Anruike/安瑞科](http://www.anruike.com) [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

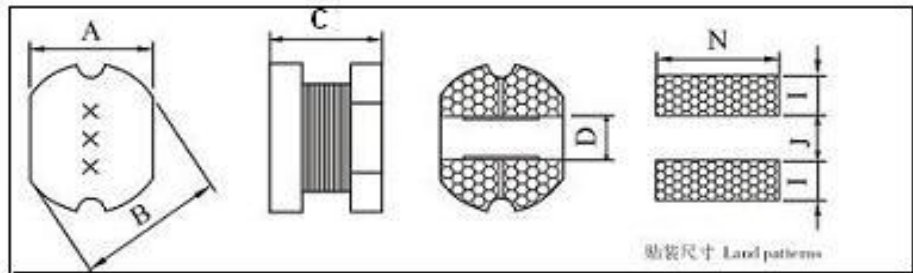

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	l	最小包装数量
CD75	7.0	7.8	5.0	2.1	7.5	3.5	1.5	1000PCS/R

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD75-2R2M	2.2	±20	100KHz/0.25V	0.01	8.50
CD75-4R7M	4.7	±20	100KHz/0.25V	0.021	5.50
CD75-100K	10	±10	100KHz/0.25V	0.030	4.30
CD75-150K	15	±10	100KHz/0.25V	0.040	3.80
CD75-180K	18	±10	100KHz/0.25V	0.052	3.20
CD75-220K	22	±10	100KHz/0.25V	0.066	2.70
CD75-270K	27	±10	100KHz/0.25V	0.080	2.50
CD75-330K	33	±10	100KHz/0.25V	0.093	2.40
CD75-390K	39	±10	100KHz/0.25V	0.107	2.20
CD75-470K	47	±10	100KHz/0.25V	0.120	2.00
CD75-560K	56	±10	100KHz/0.25V	0.165	1.85
CD75-680K	68	±10	100KHz/0.25V	0.200	1.65
CD75-820K	82	±10	100KHz/0.25V	0.250	1.48
CD75-101K	100	±10	100KHz/0.25V	0.260	1.2
CD75-121K	120	±10	100KHz/0.25V	0.300	1.30
CD75-151K	150	±10	100KHz/0.25V	0.380	1.10
CD75-181K	180	±10	100KHz/0.25V	0.450	1.00
CD75-221K	220	±10	100KHz/0.25V	0.6	0.85
CD75-271K	270	±10	100KHz/0.25V	1.11	0.80
CD75-331K	330	±10	100KHz/0.25V	1.26	0.75
CD75-391K	390	±10	100KHz/0.25V	1.65	0.71
CD75-471K	470	±10	100KHz/0.25V	1.77	0.65
CD75-561K	560	±10	100KHz/0.25V	1.80	0.58
CD75-681K	680	±10	100KHz/0.25V	1.90	0.50
CD75-821K	820	±10	100KHz/0.25V	2.15	0.41
CD75-102K	1000	±10	100KHz/0.25V	2.7	0.4

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商 Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818