
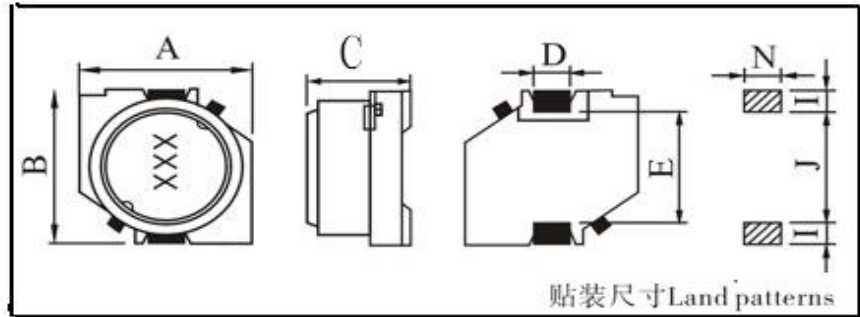


Anruike 安瑞科 / SMD POWER INDUCTORS CDB0703C SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

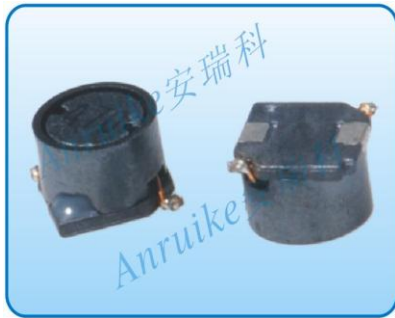

产品型号	A(Max)	B(Max)	C(Max)	D	E	F	G	载带盘装
CDB0703C	7.4	7.4	3.5	2.0	5.4	1.5	5.0	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (μH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDB0703C-1R0M	1.0	± 20	100KHz/0.25V	0.02	3.12
CDB0703C-1R5M	1.5	± 20	100KHz/0.25V	0.02	2.85
CDB0703C-2R2M	2.2	± 20	100KHz/0.25V	0.03	2.66
CDB0703C-3R3M	3.3	± 20	100KHz/0.25V	0.03	2.26
CDB0703C-4R7M	4.7	± 20	100KHz/0.25V	0.04	1.96
CDB0703C-6R8M	6.8	± 20	100KHz/0.25V	0.05	1.76
CDB0703C-100M	10	± 20	100KHz/0.25V	0.08	1.34
CDB0703C-120M	12	± 20	100KHz/0.25V	0.09	1.23
CDB0703C-150M	15	± 20	100KHz/0.25V	0.12	1.09
CDB0703C-180M	18	± 20	100KHz/0.25V	0.13	0.99
CDB0703C-220M	22	± 20	100KHz/0.25V	0.15	0.90
CDB0703C-270M	27	± 20	100KHz/0.25V	0.21	0.81
CDB0703C-330M	33	± 20	100KHz/0.25V	0.25	0.72
CDB0703C-390M	39	± 20	100KHz/0.25V	0.31	0.67
CDB0703C-470M	47	± 20	100KHz/0.25V	0.35	0.60
CDB0703C-560M	56	± 20	100KHz/0.25V	0.43	0.55
CDB0703C-680M	68	± 20	100KHz/0.25V	0.52	0.50
CDB0703C-820M	82	± 20	100KHz/0.25V	0.60	0.46
CDB0703C-101M	100	± 20	100KHz/0.25V	0.79	0.41
CDB0703C-121M	120	± 20	100KHz/0.25V	0.83	0.38
CDB0703C-151M	150	± 20	100KHz/0.25V	0.88	0.35
CDB0703C-181M	180	± 20	100KHz/0.25V	0.95	0.30

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商.. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818