
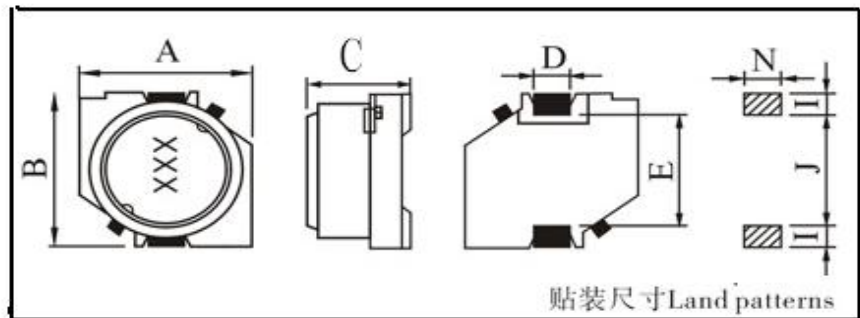


Anruike 安瑞科 / SMD POWER INDUCTORS CDB0703F SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

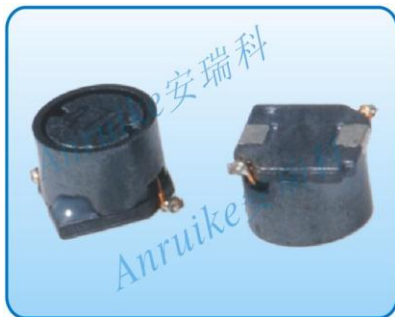

产品型号	A(Max)	B(Max)	C(Max)	D	E	F	G	载带盘装
CDB0703F	7.4	7.4	3.5	2.0	5.4	1.5	5.0	1500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (μH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDB0703F-1R0M	1.0	± 20	100KHz/0.25V	0.022	2.88
CDB0703F-1R5M	1.5	± 20	100KHz/0.25V	0.026	2.67
CDB0703F-2R2M	2.2	± 20	100KHz/0.25V	0.032	2.40
CDB0703F-3R3M	3.3	± 20	100KHz/0.25V	0.041	2.08
CDB0703F-3R9M	3.9	± 20	100KHz/0.25V	0.046	2.00
CDB0703F-4R7M	4.7	± 20	100KHz/0.25V	0.049	1.92
CDB0703F-5R6M	5.6	± 20	100KHz/0.25V	0.049	1.70
CDB0703F-6R8M	6.8	± 20	100KHz/0.25V	0.067	1.60
CDB0703F-8R2M	8.2	± 20	100KHz/0.25V	0.049	1.51
CDB0703F-100M	10	± 20	100KHz/0.25V	0.085	1.41
CDB0703F-120M	12	± 20	100KHz/0.25V	0.100	1.28
CDB0703F-150M	15	± 20	100KHz/0.25V	0.130	1.12
CDB0703F-180M	18	± 20	100KHz/0.25V	0.160	1.00
CDB0703F-220K	22	± 10	100KHz/0.25V	0.180	0.93
CDB0703F-270K	27	± 10	100KHz/0.25V	0.240	0.80
CDB0703F-330K	33	± 10	100KHz/0.25V	0.290	0.72
CDB0703F-390K	39	± 10	100KHz/0.25V	0.340	0.66
CDB0703F-470K	47	± 10	100KHz/0.25V	0.410	0.59
CDB0703F-560K	56	± 10	100KHz/0.25V	0.480	0.55
CDB0703F-680K	68	± 10	100KHz/0.25V	0.600	0.49
CDB0703F-820K	82	± 10	100KHz/0.25V	0.710	0.44
CDB0703F-101K	100	± 10	100KHz/0.25V	0.950	0.38
CDB0703F-121K	120	± 10	100KHz/0.25V	1.100	0.32
CDB0703F-151K	150	± 10	100KHz/0.25V	1.250	0.26
CDB0703F-181K	180	± 10	100KHz/0.25V	1.320	0.21
CDB0703F-221K	220	± 10	100KHz/0.25V	1.500	0.17

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818