
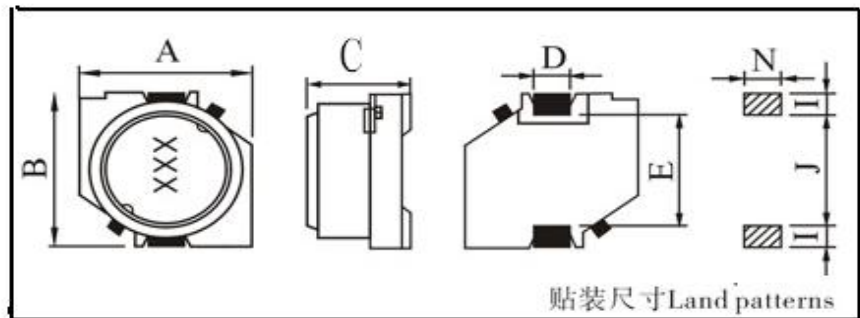


# Anruike 安瑞科 / SMD POWER INDUCTORS CDB0705C SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

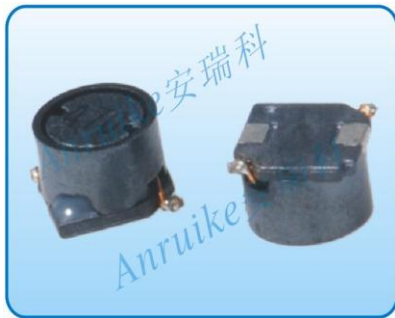

产品型号	A(Max)	B(Max)	C(Max)	D	E	F	G	载带盘装
CDB0705C	7.4	7.4	5.5	2.0	5.4	1.5	5.0	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 ( $\mu\text{H}$ )	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CDB0705C-1R0M	1.0	$\pm 20$	100KHz/0.25V	0.02	2.88
CDB0705C-2R2M	2.2	$\pm 20$	100KHz/0.25V	0.03	2.46
CDB0705C-3R3M	3.3	$\pm 20$	100KHz/0.25V	0.03	2.28
CDB0705C-100M	10	$\pm 20$	100KHz/0.25V	0.05	1.68
CDB0705C-150M	15	$\pm 20$	100KHz/0.25V	0.08	1.39
CDB0705C-180M	18	$\pm 20$	100KHz/0.25V	0.09	1.26
CDB0705C-220M	22	$\pm 20$	100KHz/0.25V	0.11	1.13
CDB0705C-270M	27	$\pm 20$	100KHz/0.25V	0.15	1.02
CDB0705C-330M	33	$\pm 20$	100KHz/0.25V	0.17	0.84
CDB0705C-390M	39	$\pm 20$	100KHz/0.25V	0.18	0.80
CDB0705C-470M	47	$\pm 20$	100KHz/0.25V	0.20	0.76
CDB0705C-560M	56	$\pm 20$	100KHz/0.25V	0.28	0.64
CDB0705C-680M	68	$\pm 20$	100KHz/0.25V	0.32	0.60
CDB0705C-820M	82	$\pm 20$	100KHz/0.25V	0.35	0.57
CDB0705C-101M	100	$\pm 20$	100KHz/0.25V	0.40	0.50
CDB0705C-121M	120	$\pm 20$	100KHz/0.25V	0.44	0.47
CDB0705C-151M	150	$\pm 20$	100KHz/0.25V	0.73	0.40
CDB0705C-181M	180	$\pm 20$	100KHz/0.25V	0.78	0.39
CDB0705C-221M	220	$\pm 20$	100KHz/0.25V	0.94	0.33
CDB0705C-271M	270	$\pm 20$	100KHz/0.25V	1.25	0.31
CDB0705C-331M	330	$\pm 20$	100KHz/0.25V	1.40	0.27
CDB0705C-391M	390	$\pm 20$	100KHz/0.25V	1.52	0.27
CDB0705C-471M	470	$\pm 20$	100KHz/0.25V	1.70	0.25
CDB0705C-561M	560	$\pm 20$	100KHz/0.25V	2.39	0.22
CDB0705C-681M	680	$\pm 20$	100KHz/0.25V	2.51	0.19
CDB0705C-821M	820	$\pm 20$	100KHz/0.25V	2.80	0.15

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商.. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818