
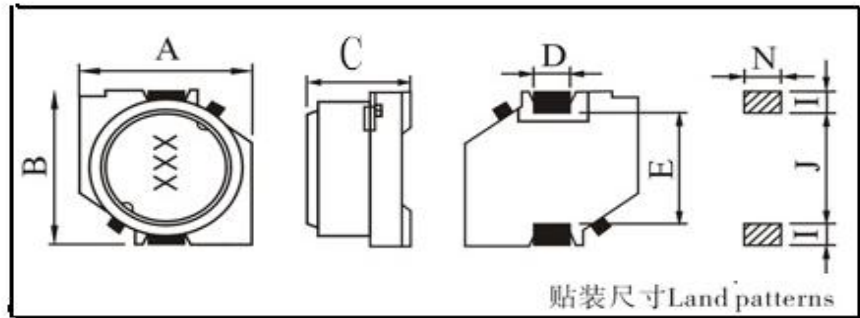


# Anruike 安瑞科 / SMD POWER INDUCTORS CDB0705F SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

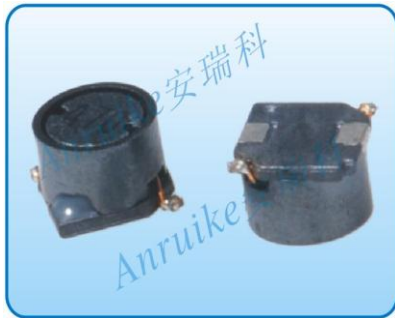

产品型号	A(Max)	B(Max)	C(Max)	D	E	F	G	载带盘装
CDB0705F	7.4	7.4	5.5	2.0	5.4	1.5	5.0	1500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 ( $\mu\text{H}$ )	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CDB0705F-1R0M	1.0	$\pm 20$	100KHz/0.25V	0.02	2.88
CDB0705F-1R5M	1.5	$\pm 20$	100KHz/0.25V	0.03	2.56
CDB0705F-2R2M	2.2	$\pm 20$	100KHz/0.25V	0.03	2.36
CDB0705F-3R3M	3.3	$\pm 20$	100KHz/0.25V	0.04	2.16
CDB0705F-4R7M	4.7	$\pm 20$	100KHz/0.25V	0.05	1.88
CDB0705F-6R8M	6.8	$\pm 20$	100KHz/0.25V	0.06	1.68
CDB0705F-100M	10	$\pm 20$	100KHz/0.25V	0.07	1.56
CDB0705F-120M	12	$\pm 20$	100KHz/0.25V	0.08	1.44
CDB0705F-150M	15	$\pm 20$	100KHz/0.25V	0.09	1.36
CDB0705F-180M	18	$\pm 20$	100KHz/0.25V	0.10	1.28
CDB0705F-220K	22	$\pm 10$	100KHz/0.25V	0.12	1.17
CDB0705F-270K	27	$\pm 10$	100KHz/0.25V	0.14	1.07
CDB0705F-330K	33	$\pm 10$	100KHz/0.25V	0.16	1.00
CDB0705F-390K	39	$\pm 10$	100KHz/0.25V	0.19	0.91
CDB0705F-470K	47	$\pm 10$	100KHz/0.25V	0.22	0.84
CDB0705F-560K	56	$\pm 10$	100KHz/0.25V	0.29	0.72
CDB0705F-680K	68	$\pm 10$	100KHz/0.25V	0.34	0.66
CDB0705F-820K	82	$\pm 10$	100KHz/0.25V	0.46	0.58
CDB0705F-101K	100	$\pm 10$	100KHz/0.25V	0.55	0.51
CDB0705F-121K	120	$\pm 10$	100KHz/0.25V	0.67	0.42
CDB0705F-151K	150	$\pm 10$	100KHz/0.25V	0.90	0.37
CDB0705F-181K	180	$\pm 10$	100KHz/0.25V	1.05	0.35
CDB0705F-221K	220	$\pm 10$	100KHz/0.25V	1.35	0.29
CDB0705F-271K	270	$\pm 10$	100KHz/0.25V	1.55	0.28
CDB0705F-331K	330	$\pm 10$	100KHz/0.25V	1.71	0.25
CDB0705F-391K	390	$\pm 10$	100KHz/0.25V	1.90	0.20

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818