
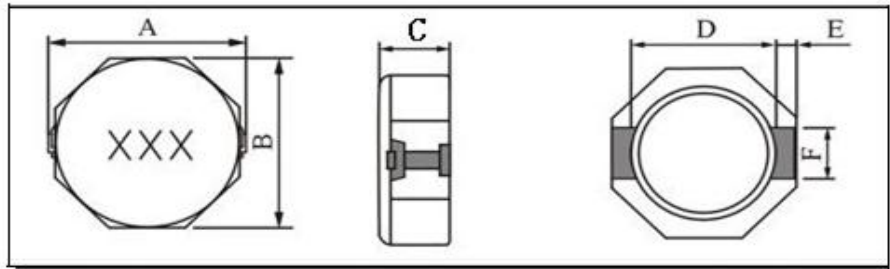


# Anruike 安瑞科 / SMD POWER INDUCTORS **CDDR8D28** SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

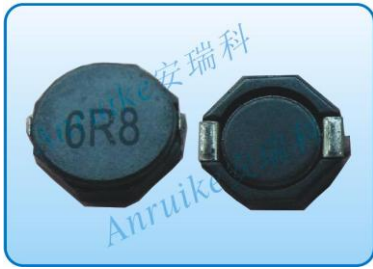

型号	A(MAX)	B(MAX)	C (MAX)	D	E	F	载带盘装
CDDR8D28	9.0	8.3	3.0	6.3	1.2	2.6	1500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 ( $\mu\text{H}$ )	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CDDR8D28-2R2M	2.2	$\pm 20$	100KHz/0.25V	0.017	6.0
CDDR8D28-3R3M	3.3	$\pm 20$	100KHz/0.25V	0.025	4.9
CDDR8D28-4R7M	4.7	$\pm 20$	100KHz/0.25V	0.026	4.5
CDDR8D28-5R6M	5.6	$\pm 20$	100KHz/0.25V	0.03	4.0
CDDR8D28-6R8M	6.8	$\pm 20$	100KHz/0.25V	0.034	2.79
CDDR8D28-8R2M	8.2	$\pm 20$	100KHz/0.25V	0.041	2.68
CDDR8D28-100M	10	$\pm 20$	100KHz/0.25V	0.047	2.50
CDDR8D28-120M	12	$\pm 20$	100KHz/0.25V	0.053	2.20
CDDR8D28-150M	15	$\pm 20$	100KHz/0.25V	0.069	2.1
CDDR8D28-180M	18	$\pm 20$	100KHz/0.25V	0.078	2.0
CDDR8D28-220M	22	$\pm 20$	100KHz/0.25V	0.11	1.9
CDDR8D28-270M	27	$\pm 20$	100KHz/0.25V	0.124	1.8
CDDR8D28-330M	33	$\pm 20$	100KHz/0.25V	0.14	1.7
CDDR8D28-390M	39	$\pm 20$	100KHz/0.25V	0.173	1.5
CDDR8D28-470M	47	$\pm 20$	100KHz/0.25V	0.19	1.4
CDDR8D28-560M	56	$\pm 20$	100KHz/0.25V	0.26	1.20
CDDR8D28-680M	68	$\pm 20$	100KHz/0.25V	0.27	1.15
CDDR8D28-820M	82	$\pm 20$	100KHz/0.25V	0.35	1.0
CDDR8D28-101M	100	$\pm 20$	100KHz/0.25V	0.39	0.95
CDDR8D28-121M	120	$\pm 20$	100KHz/0.25V	0.5	0.64
CDDR8D28-151M	150	$\pm 20$	100KHz/0.25V	0.6	0.61
CDDR8D28-181M	180	$\pm 20$	100KHz/0.25V	0.7	0.58
CDDR8D28-221M	220	$\pm 20$	100KHz/0.25V	0.9	0.51
CDDR8D28-271M	270	$\pm 20$	100KHz/0.25V	1.167	0.48
CDDR8D28-331M	330	$\pm 20$	100KHz/0.25V	1.173	0.40
CDDR8D28-471M	470	$\pm 20$	100KHz/0.25V	1.200	0.35

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ: 1193940818