
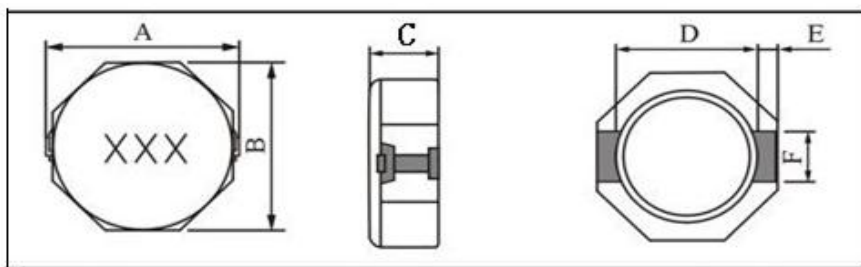


Anruike 安瑞科/SMD POWER INDUCTORS **CDDR8D38** SERIES

外型及尺寸 (单位 : mm) Shape and size (unit: mm)

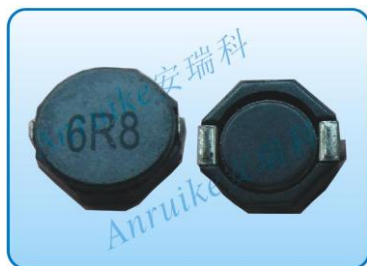

型号	A(MAX)	B(MAX)	C (MAX)	D	E	F	载带盘装
CDDR8D38	9.0	8.3	4.0	6.3	1.2	2.6	1000PCS/R

电气参数:Electrical parameters

Anruike/安瑞科

www.anruike.com

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDDR8D38-1R0M	1.0	±20	100KHz/0.25V	0.01	9.0
CDDR8D38-1R5M	1.5	±20	100KHz/0.25V	0.013	7.00
CDDR8D38-2R2M	2.2	±20	100KHz/0.25V	0.015	6.0
CDDR8D38-3R3M	3.3	±20	100KHz/0.25V	0.019	4.7
CDDR8D38-4R7M	4.7	±20	100KHz/0.25V	0.023	4.3
CDDR8D38-5R6M	5.6	±20	100KHz/0.25V	0.026	3.8
CDDR8D38-6R8M	6.8	±20	100KHz/0.25V	0.030	3.6
CDDR8D38-8R2M	8.2	±20	100KHz/0.25V	0.038	3.5
CDDR8D38-100M	10	±20	100KHz/0.25V	0.04	3.0
CDDR8D38-120M	12	±20	100KHz/0.25V	0.054	2.8
CDDR8D38-150M	15	±20	100KHz/0.25V	0.06	2.5
CDDR8D38-180M	18	±20	100KHz/0.25V	0.065	2.3
CDDR8D38-220M	22	±20	100KHz/0.25V	0.07	2.0
CDDR8D38-330M	33	±20	100KHz/0.25V	0.10	1.8
CDDR8D38-390M	39	±20	100KHz/0.25V	0.12	1.5
CDDR8D38-470M	47	±20	100KHz/0.25V	0.13	1.25
CDDR8D38-560M	56	±20	100KHz/0.25V	0.17	1.2
CDDR8D38-680M	68	±20	100KHz/0.25V	0.18	1.15
CDDR8D38-820M	82	±20	100KHz/0.25V	0.378	1.0
CDDR8D38-101M	100	±20	100KHz/0.25V	0.410	0.9
CDDR8D38-151M	150	±20	100KHz/0.25V	0.51	0.8
CDDR8D38-181M	180	±20	100KHz/0.25V	0.57	0.7
CDDR8D38-221M	220	±20	100KHz/0.25V	0.8	0.6
CDDR8D38-331M	330	±20	100KHz/0.25V	1.0	0.5
CDDR8D38-471M	470	±20	100KHz/0.25V	1.4	0.45
CDDR8D38-821M	820	±20	100KHz/0.25V	2.9	0.33

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818