
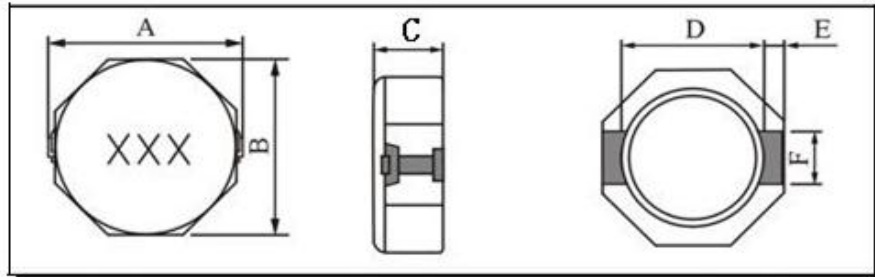


# Anruike 安瑞科 / SMD POWER INDUCTORS **CDDR8D43** SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) [www.anruike.com](http://www.anruike.com)

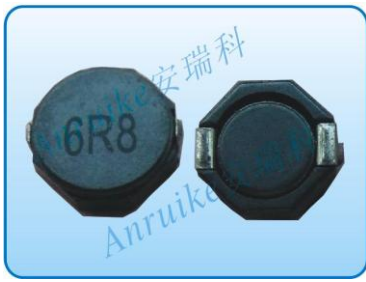

型号	A(MAX)	B(MAX)	C (MAX)	D	E	F	载带盘装
CDDR8D43	9.0	8.3	4.5	6.3	1.2	2.6	1000PCS/R

电气参数:Electrical parameters: [Anruike/安瑞科](http://www.anruike.com) [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDDR8D43-2R2M	2.2	±20	100KHz/0.25V	0.014	7.0
CDDR8D43-3R3M	3.3	±20	100KHz/0.25V	0.019	6.1
CDDR8D43-4R7M	4.7	±20	100KHz/0.25V	0.022	5.8
CDDR8D43-5R6M	5.6	±20	100KHz/0.25V	0.023	5.5
CDDR8D43-6R8M	6.8	±20	100KHz/0.25V	0.03	4.7
CDDR8D43-8R2M	8.2	±20	100KHz/0.25V	0.033	4.5
CDDR8D43-100M	10	±20	100KHz/0.25V	0.038	4.0
CDDR8D43-120M	12	±20	100KHz/0.25V	0.046	3.5
CDDR8D43-150M	15	±20	100KHz/0.25V	0.058	3.3
CDDR8D43-180M	18	±20	100KHz/0.25V	0.073	3.0
CDDR8D43-220M	22	±20	100KHz/0.25V	0.085	2.6
CDDR8D43-330M	33	±20	100KHz/0.25V	0.12	2.2
CDDR8D43-390M	39	±20	100KHz/0.25V	0.13	2.3
CDDR8D43-470M	47	±20	100KHz/0.25V	0.150	2.0
CDDR8D43-560M	56	±20	100KHz/0.25V	0.189	1.8
CDDR8D43-680M	68	±20	100KHz/0.25V	0.23	1.5
CDDR8D43-820M	82	±20	100KHz/0.25V	0.298	1.5
CDDR8D43-101M	100	±20	100KHz/0.25V	0.360	1.3
CDDR8D43-151M	150	±20	100KHz/0.25V	0.48	1.3
CDDR8D43-181M	180	±20	100KHz/0.25V	0.54	1.2
CDDR8D43-221M	220	±20	100KHz/0.25V	0.8	0.8
CDDR8D43-331M	330	±20	100KHz/0.25V	1.1	0.65

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818