
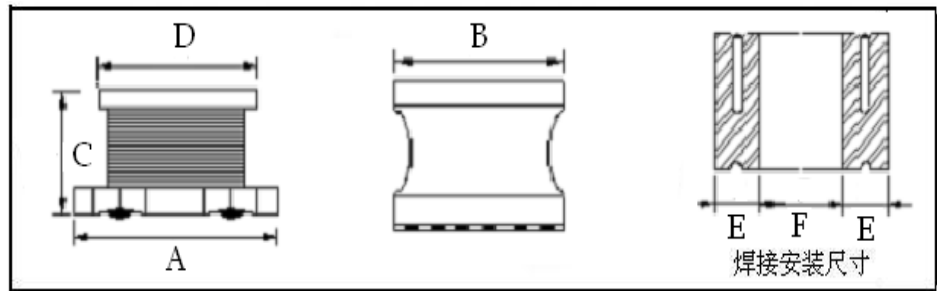


# Anruike 安瑞科/SMDPOWERINDUCTORS CDE321618 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A(±0.3)	B(±0.2)	C(±0.2)	D	E	F	载带盘装
CDE321618	3.2	1.6	1.8	2.3	0.7	0.7	2000PCS/R

电气性能 Electrical properties

Anruike/安瑞科

[www.anruike.com](http://www.anruike.com)

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDE321618-1R0M	1.0	±20	100KHz/0.25V	0.49	2.80
CDE321618-2R2M	2.2	±20	100KHz/0.25V	0.54	2.45
CDE321618-2R7M	2.7	±20	100KHz/0.25V	0.55	2.30
CDE321618-3R3M	3.3	±20	100KHz/0.25V	0.61	1.50
CDE321618-4R7M	4.7	±20	100KHz/0.25V	1.70	1.23
CDE321618-5R6M	5.6	±20	100KHz/0.25V	1.80	1.21
CDE321618-6R8M	6.8	±20	100KHz/0.25V	2.00	1.18
CDE321618-8R2M	8.2	±20	100KHz/0.25V	2.20	1.15
CDE321618-100K	10	±10	100KHz/0.25V	2.50	1.10
CDE321618-150K	12	±10	100KHz/0.25V	2.50	1.08
CDE321618-180K	18	±10	100KHz/0.25V	2.90	1.02
CDE321618-220K	22	±10	100KHz/0.25V	3.00	0.95
CDE321618-270K	27	±10	100KHz/0.25V	3.10	0.58
CDE321618-330K	33	±10	100KHz/0.25V	3.40	0.55
CDE321618-390K	39	±10	100KHz/0.25V	3.60	0.53
CDE321618-470K	47	±10	100KHz/0.25V	4.5	0.48
CDE321618-560K	56	±10	100KHz/0.25V	5.9	0.42
CDE321618-680K	68	±10	100KHz/0.25V	6.1	0.40
CDE321618-820K	82	±10	100KHz/0.25V	6.5	0.38
CDE321618-101K	100	±10	100KHz/0.25V	6.7	0.36
CDE321618-121K	120	±10	100KHz/0.25V	9.00	0.30
CDE321618-151K	150	±10	100KHz/0.25V	9.30	0.21
CDE321618-181K	180	±10	100KHz/0.25V	9.35	0.03
CDE321618-221K	220	±10	100KHz/0.25V	9.40	0.02
CDE321618-271K	270	±10	100KHz/0.25V	9.50	0.01

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818