
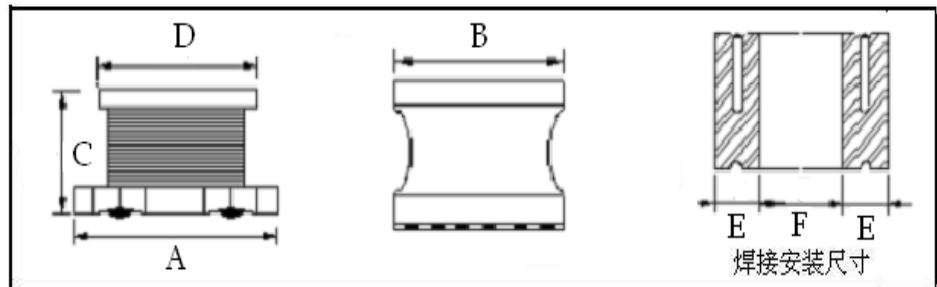


Anruike 安瑞科/SMDPOWERINDUCTORS CDE453226 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A(±0.3)	B(±0.2)	C(±0.2)	D	E	F	载带盘装
CDE453226	4.5	3.2	2.6	3.6	1.2	1.6	2000PCS/R

电气性能 Electrical properties

Anruike/安瑞科

www.anruike.com

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDE453226-1R0M	1.0	±20	100KHz/0.25V	0.10	3.30
CDE453226-2R2M	2.2	±20	100KHz/0.25V	0.15	3.10
CDE453226-3R3M	3.3	±20	100KHz/0.25V	0.18	2.56
CDE453226-4R7M	4.7	±20	100KHz/0.25V	0.20	2.30
CDE453226-6R8M	6.8	±20	100KHz/0.25V	0.23	1.85
CDE453226-8R2M	8.2	±20	100KHz/0.25V	0.25	1.73
CDE453226-100K	10	±10	100KHz/0.25V	0.28	1.67
CDE453226-150K	15	±10	100KHz/0.25V	0.31	1.65
CDE453226-180K	18	±10	100KHz/0.25V	0.33	1.58
CDE453226-220K	22	±10	100KHz/0.25V	0.35	1.5
CDE453226-270K	27	±10	100KHz/0.25V	1.10	1.32
CDE453226-330K	33	±10	100KHz/0.25V	1.20	1.10
CDE453226-470K	47	±10	100KHz/0.25V	1.50	1.00
CDE453226-560K	56	±10	100KHz/0.25V	1.70	0.94
CDE453226-680K	68	±10	100KHz/0.25V	1.90	0.91
CDE453226-820K	82	±10	100KHz/0.25V	2.20	0.85
CDE453226-101K	100	±10	100KHz/0.25V	2.50	0.79
CDE453226-121K	120	±10	100KHz/0.25V	3.00	0.65
CDE453226-151K	150	±10	100KHz/0.25V	3.70	0.60
CDE453226-181K	180	±10	100KHz/0.25V	3.90	0.45
CDE453226-221K	220	±10	100KHz/0.25V	4.10	0.41
CDE453226-331K	330	±10	100KHz/0.25V	5.0	0.38
CDE453226-471K	470	±10	100KHz/0.25V	5.5	0.10

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818