
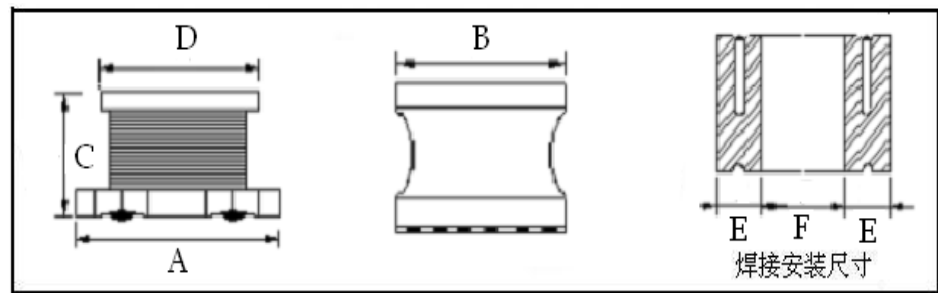


Anruike 安瑞科/SMDPOWERINDUCTORS CDE575047 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A(±0.3)	B(±0.2)	C(±0.2)	D	E	F	载带盘装
CDE575047	5.7	5.0	4.7	5.0	1.3	1.7	1000PCS/R

电气性能 Electrical properties

Anruike/安瑞科

www.anruike.com

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDE575047-1R0M	1.0	±20	100KHz/0.25V	0.02	4.00
CDE575047-2R2M	2.2	±20	100KHz/0.25V	0.04	3.20
CDE575047-3R3M	3.3	±20	100KHz/0.25V	0.05	2.90
CDE575047-4R7M	4.7	±20	100KHz/0.25V	0.05	2.70
CDE575047-6R8M	6.8	±20	100KHz/0.25V	0.10	2.00
CDE575047-100K	10	±10	100KHz/0.25V	0.13	1.70
CDE575047-150K	15	±10	100KHz/0.25V	0.21	1.40
CDE575047-220K	22	±10	100KHz/0.25V	0.27	1.20
CDE575047-330K	33	±10	100KHz/0.25V	0.45	0.90
CDE575047-470K	47	±10	100KHz/0.25V	0.56	0.80
CDE575047-560K	56	±10	100KHz/0.25V	0.60	0.80
CDE575047-101K	100	±10	100KHz/0.25V	1.20	0.56
CDE575047-151K	150	±10	100KHz/0.25V	2.60	0.42
CDE575047-221K	220	±10	100KHz/0.25V	3.36	0.32
CDE575047-331K	330	±10	100KHz/0.25V	6.16	0.27
CDE575047-471K	470	±10	100KHz/0.25V	7.56	0.24
CDE575047-561K	560	±10	100KHz/0.25V	8.00	0.20
CDE575047-681K	680	±10	100KHz/0.25V	11.30	0.19
CDE575047-821K	820	±10	100KHz/0.25V	12.00	0.17
CDE575047-102K	1000	±10	100KHz/0.25V	14.40	0.15
CDE575047-152K	1500	±10	100KHz/0.25V	30.10	0.10
CDE575047-222K	2200	±10	100KHz/0.25V	45.00	0.09
CDE575047-332K	3300	±10	100KHz/0.25V	50.00	0.08
CDE575047-472K	4700	±10	100KHz/0.25V	61.00	0.07
CDE575047-682K	6800	±10	100KHz/0.25V	100.00	0.06
CDE575047-822K	8200	±10	100KHz/0.25V	125.00	0.05

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818