
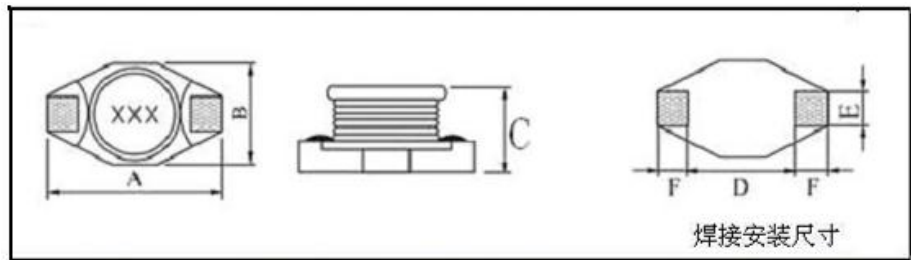


Anruike 安瑞科/SMD POWER INDUCTORS CDF5022 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (Max)	B (Max)	C (Max)	D	E	F	载带盘装
CDF5022	18.54	15.20	7.11	12.7	2.45	2.45	500PCS/R

电气参数:Electrical parameters

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDF5022-3R3M	3.3	± 20	100KHz/0.25V	0.018	14.0
CDF5022-6R8M	6.8	± 20	100KHz/0.25V	0.019	12.0
CDF5022-100M	10	± 20	100KHz/0.25V	0.023	11.3
CDF5022-120M	12	± 20	100KHz/0.25V	0.034	10.0
CDF5022-150M	15	± 20	100KHz/0.25V	0.036	9.8
CDF5022-180M	18	± 20	100KHz/0.25V	0.040	9.5
CDF5022-220M	22	± 20	100KHz/0.25V	0.047	9.8
CDF5022-270M	27	± 20	100KHz/0.25V	0.057	8.9
CDF5022-330M	33	± 20	100KHz/0.25V	0.063	8.6
CDF5022-390M	39	± 20	100KHz/0.25V	0.074	7.0
CDF5022-470M	47	± 20	100KHz/0.25V	0.086	6.5
CDF5022-680M	68	± 20	100KHz/0.25V	0.1	5.0
CDF5022-101K	100	± 10	100KHz/0.25V	0.190	4.5
CDF5022-121K	120	± 10	100KHz/0.25V	0.210	4.3
CDF5022-151K	150	± 10	100KHz/0.25V	0.230	4.0
CDF5022-181K	180	± 10	100KHz/0.25V	0.310	3.9
CDF5022-221K	220	± 10	100KHz/0.25V	0.330	3.8
CDF5022-271K	270	± 10	100KHz/0.25V	0.450	3.2
CDF5022-331K	330	± 10	100KHz/0.25V	0.560	2.9
CDF5022-391K	390	± 10	100KHz/0.25V	0.670	2.7
CDF5022-471K	470	± 10	100KHz/0.25V	0.850	2.4
CDF5022-561K	560	± 10	100KHz/0.25V	0.960	2.3
CDF5022-681K	680	± 10	100KHz/0.25V	1.100	2.2
CDF5022-821K	820	± 10	100KHz/0.25V	1.320	2.1
CDF5022-102K	1000	± 10	100KHz/0.25V	1.800	2.0
CDF5022-122K	1200	± 10	100KHz/0.25V	1.800	1.9
CDF5022-182K	1800	± 10	100KHz/0.25V	2.440	1.2

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818