
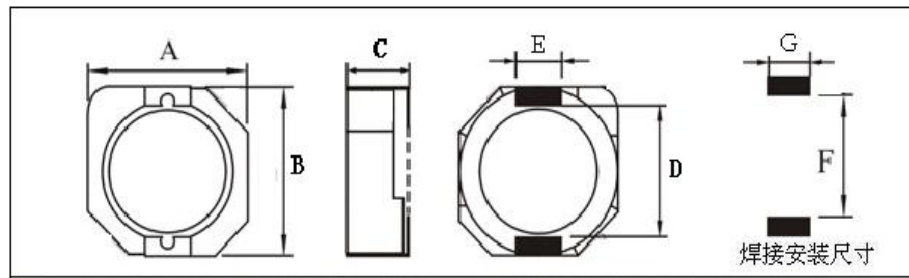


Anruike 安瑞科/SMD POWER INDUCTORS **CDQ63** SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

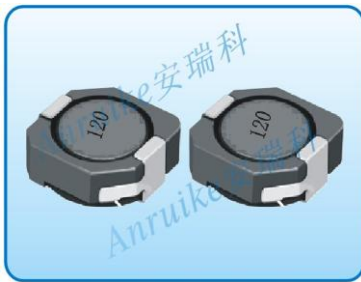

产品型号	A(MAX)	B(MAX)	C (MAX)	D	E	F	G	载带盘装
CDQ63	6.2	6.3	3.0	4.7	0.62	2.0	3.0	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDQ63-2R7N	2.7	±30	100KHz/0.25V	0.01	2.60
CDQ63-3R3N	3.3	±30	100KHz/0.25V	0.02	2.30
CDQ63-5R0N	5.0	±30	100KHz/0.25V	0.03	1.85
CDQ63-8R0N	8.0	±30	100KHz/0.25V	0.05	1.50
CDQ63-100M	10	±20	100KHz/0.25V	0.05	1.30
CDQ63-120M	12	±20	100KHz/0.25V	0.07	1.20
CDQ63-150M	15	±20	100KHz/0.25V	0.08	1.10
CDQ63-180M	18	±20	100KHz/0.25V	0.10	1.05
CDQ63-220M	22	±20	100KHz/0.25V	0.11	0.95
CDQ63-270M	27	±20	100KHz/0.25V	0.14	0.85
CDQ63-330M	33	±20	100KHz/0.25V	0.18	0.76
CDQ63-390M	39	±20	100KHz/0.25V	0.21	0.68
CDQ63-470M	47	±20	100KHz/0.25V	0.23	0.60
CDQ63-560M	56	±20	100KHz/0.25V	0.30	0.55
CDQ63-680M	68	±20	100KHz/0.25V	0.35	0.48
CDQ63-820M	82	±20	100KHz/0.25V	0.41	0.45
CDQ63-101M	100	±20	100KHz/0.25V	0.52	0.40
CDQ63-121M	120	±20	100KHz/0.25V	0.58	0.37
CDQ63-151M	150	±20	100KHz/0.25V	0.64	0.31
CDQ63-181M	180	±20	100KHz/0.25V	0.70	0.24
CDQ63-221M	220	±20	100KHz/0.25V	0.78	0.20

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818