
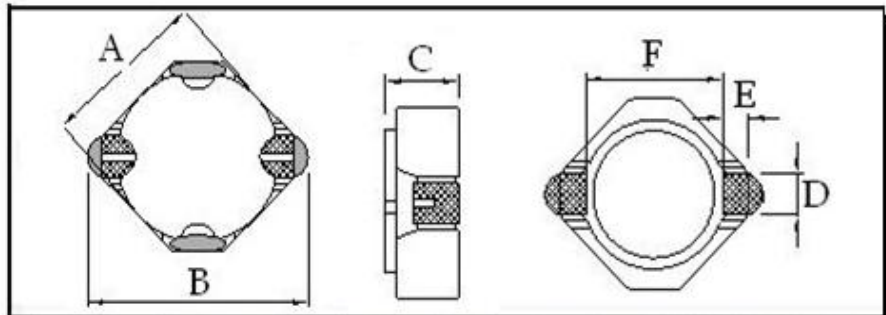


Anruike 安瑞科 / SMD POWER INDUCTORS CDT3B15 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

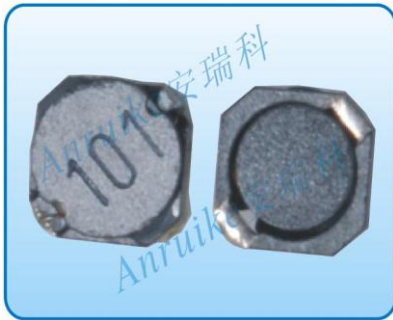

型号	A (Max)	B (Max)	C (Max)	D (Ref)	E	F	载带盘装
CDT3B15	3.0	4.6	1.5	0.55	0.30	3.0	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDT3B15-1R2M	1.2	±20	100KHz/0.25V	0.03	1.30
CDT3B15-1R5M	1.5	±20	100KHz/0.25V	0.03	1.20
CDT3B15-2R0M	2.0	±20	100KHz/0.25V	0.04	1.00
CDT3B15-2R2M	2.2	±20	100KHz/0.25V	0.05	0.90
CDT3B15-2R7M	2.7	±20	100KHz/0.25V	0.07	0.80
CDT3B15-3R3M	3.3	±20	100KHz/0.25V	0.08	0.75
CDT3B15-3R9M	3.9	±20	100KHz/0.25V	0.09	0.70
CDT3B15-4R7M	4.7	±20	100KHz/0.25V	0.10	0.65
CDT3B15-5R6M	5.6	±20	100KHz/0.25V	0.14	0.62
CDT3B15-6R8M	6.8	±20	100KHz/0.25V	0.15	0.58
CDT3B15-8R2M	8.2	±20	100KHz/0.25V	0.20	0.54
CDT3B15-100M	10	±20	100KHz/0.25V	0.23	0.49
CDT3B15-120M	12	±20	100KHz/0.25V	0.31	0.44
CDT3B15-150M	15	±20	100KHz/0.25V	0.36	0.40
CDT3B15-180M	18	±20	100KHz/0.25V	0.44	0.36
CDT3B15-220M	22	±20	100KHz/0.25V	0.55	0.33
CDT3B15-270M	27	±20	100KHz/0.25V	0.71	0.30
CDT3B15-330M	33	±20	100KHz/0.25V	0.81	0.27
CDT3B15-390M	39	±20	100KHz/0.25V	0.88	0.25
CDT3B15-470M	47	±20	100KHz/0.25V	0.97	0.20
CDT3B15-560M	56	±20	100KHz/0.25V	1.10	0.13

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商.. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818