
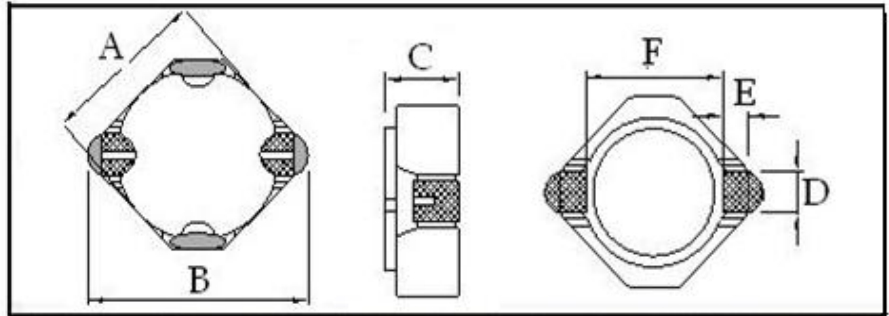


# Anruike 安瑞科 / SMD POWER INDUCTORS CDT4B18 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

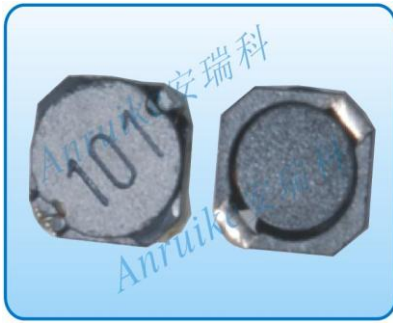

型号	A (Max)	B (Max)	C (Max)	D (Ref)	E	F	载带盘装
CDT4B18	4.0	6.1	1.8	1.0	0.35	3.3	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CDT4B18-1R5M	1.5	$\pm 20$	100KHz/0.25V	0.021	1.40
CDT4B18-1R8M	1.8	$\pm 20$	100KHz/0.25V	0.026	1.20
CDT4B18-2R2M	2.2	$\pm 20$	100KHz/0.25V	0.028	1.10
CDT4B18-2R4M	2.4	$\pm 20$	100KHz/0.25V	0.030	1.00
CDT4B18-2R7M	2.7	$\pm 20$	100KHz/0.25V	0.034	0.97
CDT4B18-3R3M	3.3	$\pm 20$	100KHz/0.25V	0.040	0.94
CDT4B18-3R6M	3.6	$\pm 20$	100KHz/0.25V	0.046	0.90
CDT4B18-4R3M	4.3	$\pm 20$	100KHz/0.25V	0.055	0.80
CDT4B18-4R7M	4.7	$\pm 20$	100KHz/0.25V	0.062	0.75
CDT4B18-5R6M	5.6	$\pm 20$	100KHz/0.25V	0.072	0.70
CDT4B18-6R8M	6.8	$\pm 20$	100KHz/0.25V	0.085	0.64
CDT4B18-7R5M	7.5	$\pm 20$	100KHz/0.25V	0.094	0.60
CDT4B18-100M	10	$\pm 20$	100KHz/0.25V	0.120	0.53
CDT4B18-120M	12	$\pm 20$	100KHz/0.25V	0.160	0.48
CDT4B18-150M	15	$\pm 20$	100KHz/0.25V	0.200	0.43
CDT4B18-180M	18	$\pm 20$	100KHz/0.25V	0.220	0.40
CDT4B18-220M	22	$\pm 20$	100KHz/0.25V	0.270	0.37
CDT4B18-270M	27	$\pm 20$	100KHz/0.25V	0.320	0.32
CDT4B18-330M	33	$\pm 20$	100KHz/0.25V	0.410	0.29
CDT4B18-390M	39	$\pm 20$	100KHz/0.25V	0.470	0.26
CDT4B18-470M	47	$\pm 20$	100KHz/0.25V	0.520	0.21
CDT4B18-560M	56	$\pm 20$	100KHz/0.25V	0.600	0.17

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818