
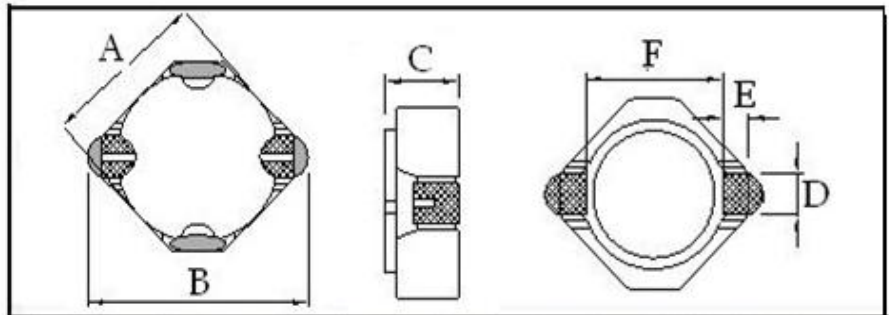


# Anruike 安瑞科 / SMD POWER INDUCTORS CDT4B20 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

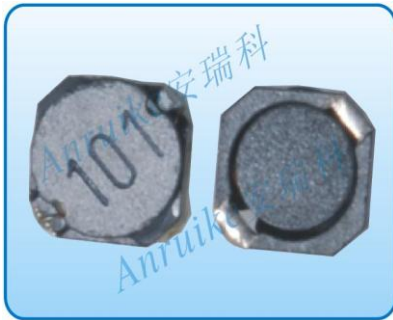

型号	A (Max)	B (Max)	C (Max)	D (Ref)	E	F	载带盘装
CDT4B20	4.0	6.1	2.0	1.0	0.35	3.3	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDT4B20-1R5M	1.5	±20	100KHz/0.25V	0.015	1.40
CDT4B20-1R8M	1.8	±20	100KHz/0.25V	0.020	1.20
CDT4B20-2R2M	2.2	±20	100KHz/0.25V	0.023	1.10
CDT4B20-2R4M	2.4	±20	100KHz/0.25V	0.026	1.00
CDT4B20-3R3M	3.3	±20	100KHz/0.25V	0.030	0.95
CDT4B20-3R6M	3.6	±20	100KHz/0.25V	0.037	0.90
CDT4B20-4R3M	4.3	±20	100KHz/0.25V	0.047	0.80
CDT4B20-4R7M	4.7	±20	100KHz/0.25V	0.049	0.87
CDT4B20-5R6M	5.6	±20	100KHz/0.25V	0.052	0.73
CDT4B20-6R8M	6.8	±20	100KHz/0.25V	0.072	0.65
CDT4B20-7R5M	7.5	±20	100KHz/0.25V	0.077	0.60
CDT4B20-8R0M	8.0	±20	100KHz/0.25V	0.088	0.58
CDT4B20-100M	10	±20	100KHz/0.25V	0.095	0.55
CDT4B20-120M	12	±20	100KHz/0.25V	0.120	0.48
CDT4B20-150M	15	±20	100KHz/0.25V	0.150	0.44
CDT4B20-180M	18	±20	100KHz/0.25V	0.190	0.40
CDT4B20-220M	22	±20	100KHz/0.25V	0.210	0.37
CDT4B20-270M	27	±20	100KHz/0.25V	0.270	0.33
CDT4B20-330M	33	±20	100KHz/0.25V	0.340	0.30
CDT4B20-390M	39	±20	100KHz/0.25V	0.380	0.27
CDT4B20-470M	47	±20	100KHz/0.25V	0.480	0.25
CDT4B20-560M	56	±20	100KHz/0.25V	0.560	0.22
CDT4B20-820M	82	±20	100KHz/0.25V	0.620	0.18

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818