
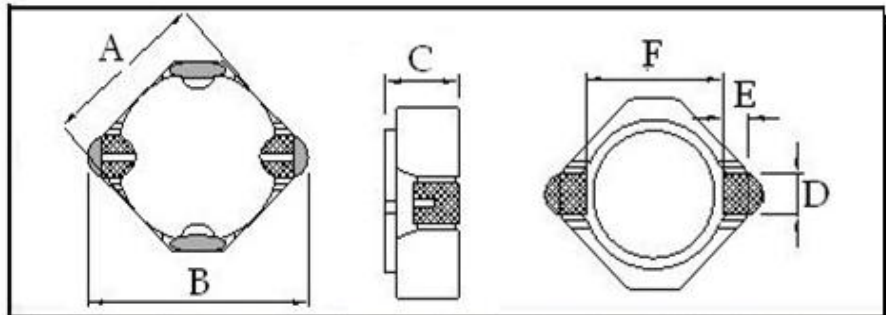


# Anruike 安瑞科 / SMD POWER INDUCTORS CDT4B28 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

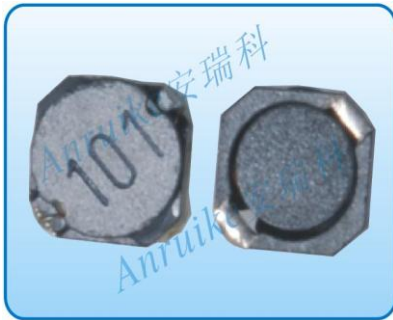

型号	A (Max)	B (Max)	C (Max)	D (Ref)	E	F	载带盘装
CDT4B28	4.0	6.1	3.0	1.0	0.35	3.3	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CDT4B28-1R5M	1.5	$\pm 20$	100KHz/0.25V	0.012	1.20
CDT4B28-1R8M	1.8	$\pm 20$	100KHz/0.25V	0.015	1.10
CDT4B28-2R4M	2.4	$\pm 20$	100KHz/0.25V	0.017	1.00
CDT4B28-3R6M	3.6	$\pm 20$	100KHz/0.25V	0.022	0.80
CDT4B28-4R3M	4.3	$\pm 20$	100KHz/0.25V	0.024	0.75
CDT4B28-5R6M	5.6	$\pm 20$	100KHz/0.25V	0.027	0.65
CDT4B28-6R8M	6.8	$\pm 20$	100KHz/0.25V	0.034	0.55
CDT4B28-7R5M	7.5	$\pm 20$	100KHz/0.25V	0.037	0.50
CDT4B28-100M	10	$\pm 20$	100KHz/0.25V	0.049	0.46
CDT4B28-120M	12	$\pm 20$	100KHz/0.25V	0.061	0.41
CDT4B28-150M	15	$\pm 20$	100KHz/0.25V	0.074	0.38
CDT4B28-180M	18	$\pm 20$	100KHz/0.25V	0.090	0.36
CDT4B28-220M	22	$\pm 20$	100KHz/0.25V	0.110	0.33
CDT4B28-270M	27	$\pm 20$	100KHz/0.25V	0.140	0.29
CDT4B28-330M	33	$\pm 20$	100KHz/0.25V	0.160	0.26
CDT4B28-390M	39	$\pm 20$	100KHz/0.25V	0.190	0.24
CDT4B28-470M	47	$\pm 20$	100KHz/0.25V	0.220	0.23
CDT4B28-560M	56	$\pm 20$	100KHz/0.25V	0.250	0.20
CDT4B28-680M	68	$\pm 20$	100KHz/0.25V	0.290	0.18
CDT4B28-820M	82	$\pm 20$	100KHz/0.25V	0.400	0.17
CDT4B28-101M	100	$\pm 20$	100KHz/0.25V	0.510	0.15
CDT4B28-121M	120	$\pm 20$	100KHz/0.25V	0.580	0.14
CDT4B28-151M	150	$\pm 20$	100KHz/0.25V	0.740	0.13
CDT4B28-181M	180	$\pm 20$	100KHz/0.25V	0.820	0.11
CDT4B28-221M	220	$\pm 20$	100KHz/0.25V	1.100	0.10
CDT4B28-271M	270	$\pm 20$	100KHz/0.25V	1.250	0.09

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818