
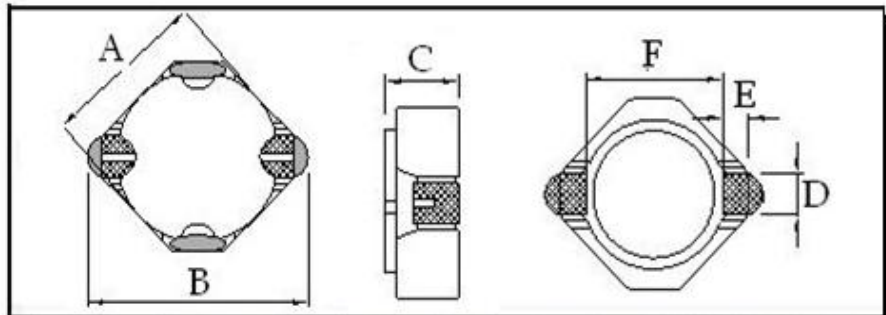


Anruike 安瑞科 / SMD POWER INDUCTORS CDT5B20 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

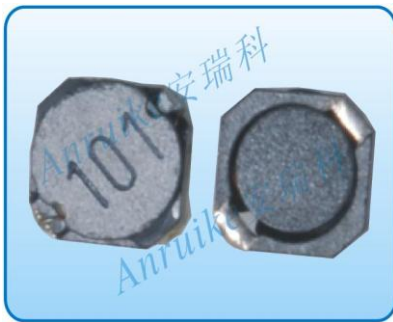

型号	A (Max)	B (Max)	C (Max)	D (Ref)	E	F	载带盘装
CDT5B20	5.0	7.5	2.2	1.2	0.4	4.0	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDT5B20-1R8M	1.8	±20	100KHz/0.25V	0.017	1.40
CDT5B20-2R2M	2.2	±20	100KHz/0.25V	0.020	0.27
CDT5B20-2R4M	2.4	±20	100KHz/0.25V	0.023	1.18
CDT5B20-2R7M	2.7	±20	100KHz/0.25V	0.027	0.12
CDT5B20-3R3M	3.3	±20	100KHz/0.25V	0.030	1.05
CDT5B20-3R9M	3.9	±20	100KHz/0.25V	0.035	0.95
CDT5B20-4R7M	4.7	±20	100KHz/0.25V	0.039	0.86
CDT5B20-5R6M	5.6	±20	100KHz/0.25V	0.050	0.80
CDT5B20-6R8M	6.8	±20	100KHz/0.25V	0.055	0.70
CDT5B20-8R2M	8.2	±20	100KHz/0.25V	0.060	0.68
CDT5B20-100M	10	±20	100KHz/0.25V	0.077	0.63
CDT5B20-120M	12	±20	100KHz/0.25V	0.090	0.54
CDT5B20-150M	15	±20	100KHz/0.25V	0.120	0.47
CDT5B20-180M	18	±20	100KHz/0.25V	0.140	0.44
CDT5B20-220M	22	±20	100KHz/0.25V	0.170	0.40
CDT5B20-270M	27	±20	100KHz/0.25V	0.210	0.37
CDT5B20-330M	33	±20	100KHz/0.25V	0.240	0.33
CDT5B20-390M	39	±20	100KHz/0.25V	0.330	0.31
CDT5B20-470M	47	±20	100KHz/0.25V	0.390	0.27
CDT5B20-560M	56	±20	100KHz/0.25V	0.420	0.24
CDT5B20-680M	68	±20	100KHz/0.25V	0.540	0.22
CDT5B20-820M	82	±20	100KHz/0.25V	0.610	0.20
CDT5B20-101M	100	±20	100KHz/0.25V	0.780	0.19
CDT5B20-221M	220	±20	100KHz/0.25V	0.820	0.14
CDT5B20-331M	330	±20	100KHz/0.25V	0.880	0.10
CDT5B20-471M	470	±20	100KHz/0.25V	0.930	0.07

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司