
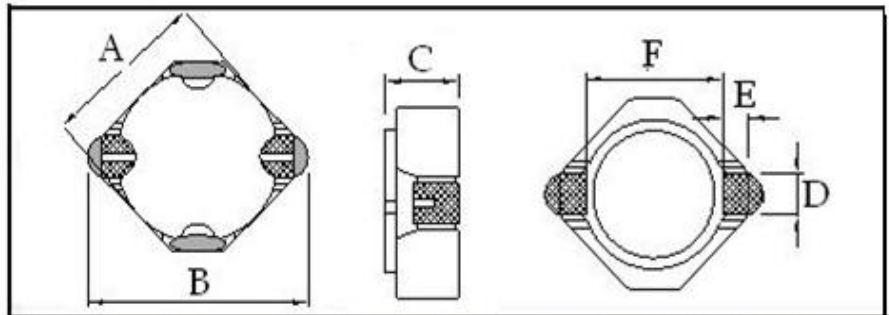


Anruike 安瑞科 / SMD POWER INDUCTORS CDT5B28 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

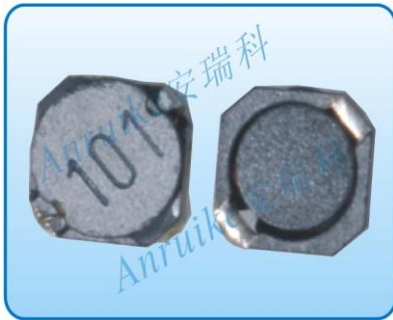

型号	A (Max)	B (Max)	C (Max)	D (Ref)	E	F	载带盘装
CDT5B28	5.0	7.5	3.0	1.2	0.4	4.0	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDT5B28-1R0M	1.0	±20	100KHz/0.25V	0.008	2.10
CDT5B28-1R5M	1.5	±20	100KHz/0.25V	0.009	1.50
CDT5B28-1R8M	1.8	±20	100KHz/0.25V	0.013	1.40
CDT5B28-2R4M	2.4	±20	100KHz/0.25V	0.015	1.20
CDT5B28-3R0M	3.0	±20	100KHz/0.25V	0.017	1.10
CDT5B28-3R9M	3.9	±20	100KHz/0.25V	0.019	1.00
CDT5B28-4R7M	4.7	±20	100KHz/0.25V	0.021	0.90
CDT5B28-5R1M	5.1	±20	100KHz/0.25V	0.023	0.85
CDT5B28-6R8M	6.8	±20	100KHz/0.25V	0.029	0.70
CDT5B28-7R5M	7.5	±20	100KHz/0.25V	0.033	0.65
CDT5B28-100M	10	±20	100KHz/0.25V	0.036	0.60
CDT5B28-120M	12	±20	100KHz/0.25V	0.047	0.55
CDT5B28-150M	15	±20	100KHz/0.25V	0.056	0.49
CDT5B28-180M	18	±20	100KHz/0.25V	0.067	0.43
CDT5B28-220M	22	±20	100KHz/0.25V	0.081	0.40
CDT5B28-270M	27	±20	100KHz/0.25V	0.101	0.36
CDT5B28-330M	33	±20	100KHz/0.25V	0.129	0.32
CDT5B28-390M	39	±20	100KHz/0.25V	0.139	0.29
CDT5B28-470M	47	±20	100KHz/0.25V	0.185	0.26
CDT5B28-560M	56	±20	100KHz/0.25V	0.208	0.24
CDT5B28-680M	68	±20	100KHz/0.25V	0.242	0.22
CDT5B28-820M	82	±20	100KHz/0.25V	0.312	0.20
CDT5B28-101M	100	±20	100KHz/0.25V	0.361	0.19
CDT5B28-121M	120	±20	100KHz/0.25V	0.449	0.17
CDT5B28-151M	150	±20	100KHz/0.25V	0.517	0.16

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818