
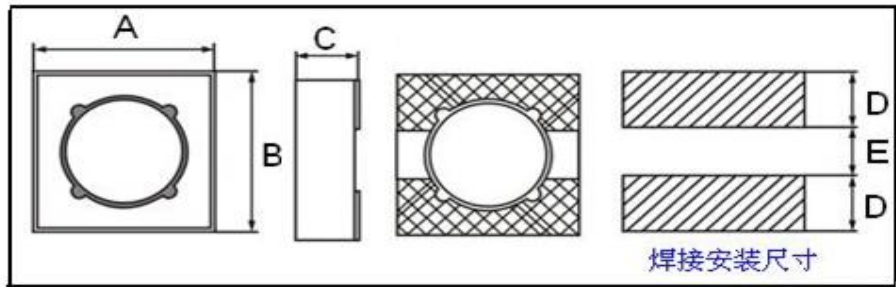


Anruike 安瑞科 / SMD POWER INDUCTORS CDU3811 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

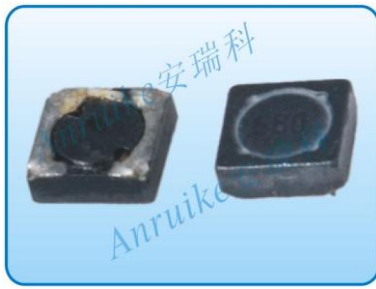

产品型号	A (max)	B (max)	C (max)	D	E	载带盘装
CDU3811	4.10	4.10	1.30	1.60	1.10	4000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDU3811-1R0M	1.0	±20	100KHz/0.25V	0.03	1.60
CDU3811-1R2M	1.2	±20	100KHz/0.25V	0.04	1.50
CDU3811-1R5M	1.5	±20	100KHz/0.25V	0.05	1.30
CDU3811-1R8M	1.8	±20	100KHz/0.25V	0.06	1.20
CDU3811-2R2M	2.2	±20	100KHz/0.25V	0.07	1.10
CDU3811-2R7M	2.7	±20	100KHz/0.25V	0.08	1.00
CDU3811-3R3M	3.3	±20	100KHz/0.25V	0.09	0.85
CDU3811-3R9M	3.9	±20	100KHz/0.25V	0.10	0.80
CDU3811-4R7M	4.7	±20	100KHz/0.25V	0.12	0.75
CDU3811-5R6M	5.6	±20	100KHz/0.25V	0.15	0.70
CDU3811-6R8M	6.8	±20	100KHz/0.25V	0.21	0.62
CDU3811-8R2M	8.2	±20	100KHz/0.25V	0.24	0.56
CDU3811-100M	10	±20	100KHz/0.25V	0.28	0.50
CDU3811-120M	12	±20	100KHz/0.25V	0.34	0.48
CDU3811-150M	15	±20	100KHz/0.25V	0.42	0.38
CDU3811-180M	18	±20	100KHz/0.25V	0.50	0.35
CDU3811-220M	22	±20	100KHz/0.25V	0.68	0.32
CDU3811-270M	27	±20	100KHz/0.25V	0.71	0.29
CDU3811-330M	33	±20	100KHz/0.25V	0.86	0.27
CDU3811-390M	39	±20	100KHz/0.25V	1.30	0.25
CDU3811-470M	47	±20	100KHz/0.25V	1.80	0.23
CDU3811-560M	56	±20	100KHz/0.25V	2.00	0.20
CDU3811-680M	68	±20	100KHz/0.25V	2.25	0.18
CDU3811-101M	100	±20	100KHz/0.25V	3.60	0.15
CDU3811-221M	220	±20	100KHz/0.25V	3.90	0.14
CDU3811-471M	470	±20	100KHz/0.25V	4.50	0.11

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ: 1193940818