
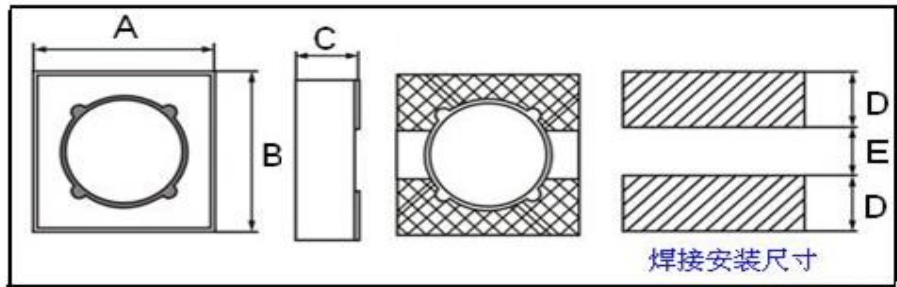


Anruike 安瑞科 / SMD POWER INDUCTORS CDU5012 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

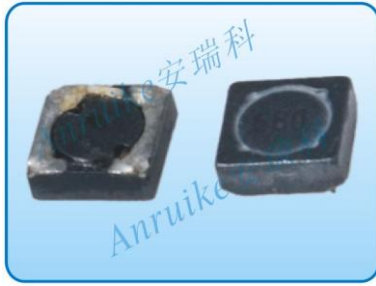

产品型号	A (max)	B (max)	C (max)	D	E	载带盘装
CDU5012	5.20	5.20	1.20	1.50	2.00	4000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDU5012-2R2M	2.2	±20	100KHz/0.25V	0.07	1.80
CDU5012-2R7M	2.7	±20	100KHz/0.25V	0.08	1.60
CDU5012-3R3M	3.3	±20	100KHz/0.25V	0.10	1.42
CDU5012-3R9M	3.9	±20	100KHz/0.25V	0.10	1.35
CDU5012-4R7M	4.7	±20	100KHz/0.25V	0.11	1.29
CDU5012-6R2M	6.2	±20	100KHz/0.25V	0.17	1.08
CDU5012-8R2M	8.2	±20	100KHz/0.25V	0.24	0.93
CDU5012-100M	10	±20	100KHz/0.25V	0.28	0.81
CDU5012-120M	12	±20	100KHz/0.25V	0.31	0.75
CDU5012-150M	15	±20	100KHz/0.25V	0.40	0.69
CDU5012-180M	18	±20	100KHz/0.25V	0.50	0.61
CDU5012-220M	22	±20	100KHz/0.25V	0.63	0.57
CDU5012-270M	27	±20	100KHz/0.25V	0.70	0.50
CDU5012-330M	33	±20	100KHz/0.25V	0.82	0.47
CDU5012-390M	39	±20	100KHz/0.25V	1.10	0.42
CDU5012-470M	47	±20	100KHz/0.25V	1.37	0.39
CDU5012-560M	56	±20	100KHz/0.25V	1.80	0.36
CDU5012-680M	68	±20	100KHz/0.25V	2.16	0.32
CDU5012-820M	82	±20	100KHz/0.25V	2.36	0.29
CDU5012-101M	100	±20	100KHz/0.25V	2.64	0.27
CDU5012-121M	120	±20	100KHz/0.25V	2.90	0.20

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818