
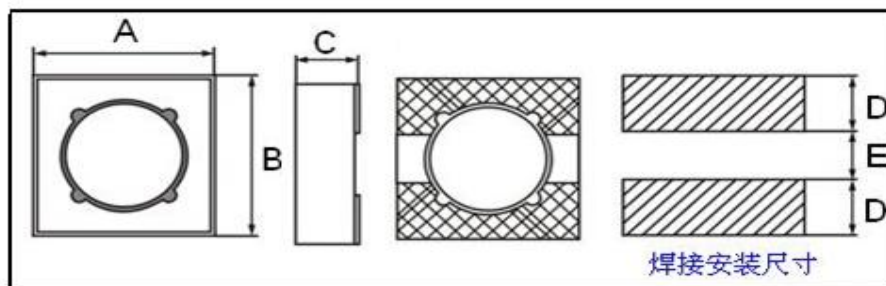


Anruike 安瑞科/SMD POWER INDUCTORS **CDU5020** SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

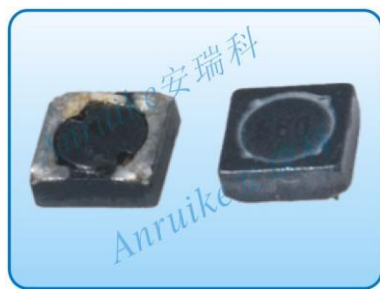

产品型号	A (max)	B (max)	C (max)	D	E	载带盘装
CDU5020	5.20	5.20	2.00	1.50	2.00	3000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDU5020-1R0M	1.5	± 20	100KHz/0.25V	0.01	2.80
CDU5020-1R2M	1.5	± 20	100KHz/0.25V	0.02	2.55
CDU5020-1R5M	1.5	± 20	100KHz/0.25V	0.03	2.15
CDU5020-2R2M	2.2	± 20	100KHz/0.25V	0.04	1.87
CDU5020-2R7M	2.7	± 20	100KHz/0.25V	0.04	1.60
CDU5020-3R3M	3.3	± 20	100KHz/0.25V	0.05	1.47
CDU5020-3R9M	3.9	± 20	100KHz/0.25V	0.05	1.40
CDU5020-4R7M	4.7	± 20	100KHz/0.25V	0.06	1.33
CDU5020-6R2M	6.2	± 20	100KHz/0.25V	0.07	1.12
CDU5020-6R8M	6.8	± 20	100KHz/0.25V	0.09	1.00
CDU5020-8R2M	8.2	± 20	100KHz/0.25V	0.10	0.96
CDU5020-100M	10	± 20	100KHz/0.25V	0.11	0.90
CDU5020-120M	12	± 20	100KHz/0.25V	0.13	0.80
CDU5020-150M	15	± 20	100KHz/0.25V	0.16	0.71
CDU5020-180M	18	± 20	100KHz/0.25V	0.18	0.62
CDU5020-220M	22	± 20	100KHz/0.25V	0.20	0.59
CDU5020-270M	27	± 20	100KHz/0.25V	0.25	0.50
CDU5020-330M	33	± 20	100KHz/0.25V	0.31	0.49
CDU5020-390M	39	± 20	100KHz/0.25V	0.38	0.45
CDU5020-470M	47	± 20	100KHz/0.25V	0.46	0.40
CDU5020-560M	56	± 20	100KHz/0.25V	0.50	0.37
CDU5020-680M	68	± 20	100KHz/0.25V	0.69	0.33
CDU5020-820M	82	± 20	100KHz/0.25V	0.78	0.30
CDU5020-101M	100	± 20	100KHz/0.25V	1.06	0.28

以上为常用参数,精准参数以样品为准.因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818