
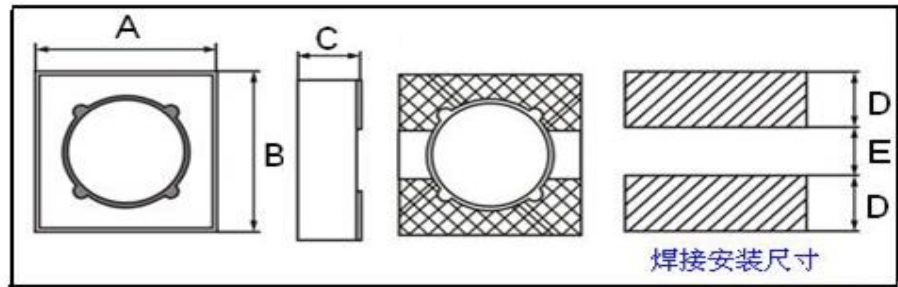


# Anruike 安瑞科 / SMD POWER INDUCTORS CDU5025 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

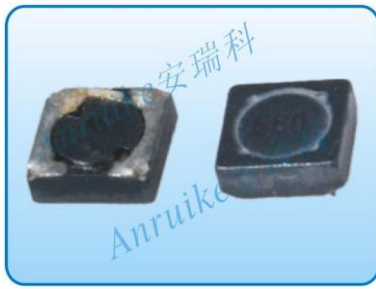

产品型号	A (max)	B (max)	C (max)	D	E	载带盘装
CDU5025	5.20	5.20	2.50	1.50	2.00	3000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC(Ω)(Max)	额定电流 IDC (A) (Max)
CDU5025-1R5M	1.5	±20	100KHz/0.25V	0.02	4.670
CDU5025-2R2M	2.2	±20	100KHz/0.25V	0.03	3.810
CDU5025-3R3M	3.3	±20	100KHz/0.25V	0.03	3.230
CDU5025-4R7M	4.7	±20	100KHz/0.25V	0.04	2.210
CDU5025-6R8M	6.8	±20	100KHz/0.25V	0.05	1.900
CDU5025-100M	10	±20	100KHz/0.25V	0.07	1.560
CDU5025-120M	12	±20	100KHz/0.25V	0.08	1.510
CDU5025-150M	15	±20	100KHz/0.25V	0.09	1.450
CDU5025-180M	18	±20	100KHz/0.25V	0.12	1.350
CDU5025-220M	22	±20	100KHz/0.25V	0.14	1.270
CDU5025-270M	27	±20	100KHz/0.25V	0.18	1.190
CDU5025-330M	33	±20	100KHz/0.25V	0.21	1.080
CDU5025-390M	39	±20	100KHz/0.25V	0.26	0.900
CDU5025-470M	47	±20	100KHz/0.25V	0.31	0.857
CDU5025-560M	56	±20	100KHz/0.25V	0.40	0.800
CDU5025-680M	68	±20	100KHz/0.25V	0.48	0.711
CDU5025-820M	82	±20	100KHz/0.25V	0.52	0.592
CDU5025-101M	100	±20	100KHz/0.25V	0.59	0.482
CDU5025-121M	120	±20	100KHz/0.25V	0.70	0.400
CDU5025-151M	150	±20	100KHz/0.25V	0.87	0.441
CDU5025-221M	220	±20	100KHz/0.25V	1.34	0.398
CDU5025-331M	330	±20	100KHz/0.25V	2.07	0.328
CDU5025-471M	470	±20	100KHz/0.25V	3.10	0.268
CDU5025-681M	680	±20	100KHz/0.25V	3.88	0.219
CDU5025-820M	820	±20	100KHz/0.25V	5.04	0.184
CDU5025-102M	1000	±20	100KHz/0.25V	5.70	0.154

以上为常用参数,精准参数以样品为准。因版面原因未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商.. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818