
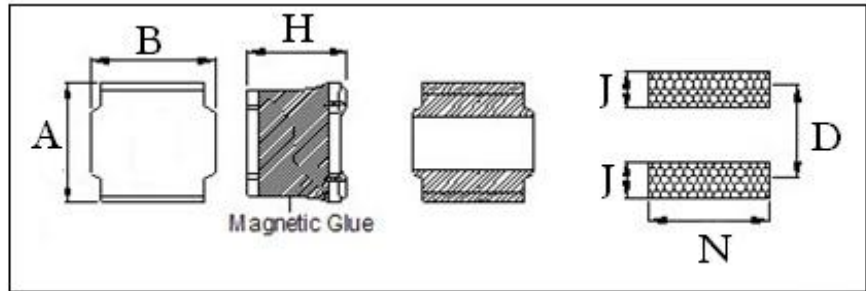


Anruike 安瑞科/SMD POWER INDUCTORS NR3010 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

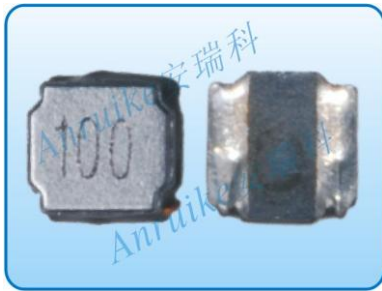

产品型号	A±0.3	B±0.3	H Max	D	N	J	最小包装数量
NR3010	3.0	3.0	1.1	2.2	2.7	0.8	2000PCS/卷

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
NR3010-1R0N	1.0	±30%	100KHz/0.1V	0.0845	1.40
NR3010-1R5N	1.5	±30%	100KHz/0.1V	0.104	1.30
NR3010-2R2N	2.2	±30%	100KHz/0.1V	0.124	1.10
NR3010-3R3N	3.3	±30%	100KHz/0.1V	0.128	0.94
NR3010-4R7N	4.7	±30%	100KHz/0.1V	0.247	0.78
NR3010-6R8N	6.8	±30%	100KHz/0.1V	0.390	0.63
NR3010-100M	10	±20%	100KHz/0.1V	0.585	0.51
NR3010-150M	15	±20%	100KHz/0.1V	0.962	0.40
NR3010-220M	22	±20%	100KHz/0.1V	1.339	0.35
NR3010-330M	33	±20%	100KHz/0.1V	2.051	0.275
NR3010-470M	47	±20%	100KHz/0.1V	2.665	0.235
NR3010-560M	56	±20%	100KHz/0.1V	2.950	0.210
NR3010-820M	82	±20%	100KHz/0.1V	3.125	0.176
NR3010-101M	100	±20%	100KHz/0.1V	3.550	0.155
NR3010-121M	120	±20%	100KHz/0.1V	3.865	0.100

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818