


Anruike 安瑞科/SMD POWER INDUCTORS NR8040 SERIES

外型及尺寸 (单位 : mm) Shape and size (unit: mm)

Anruike/安瑞科

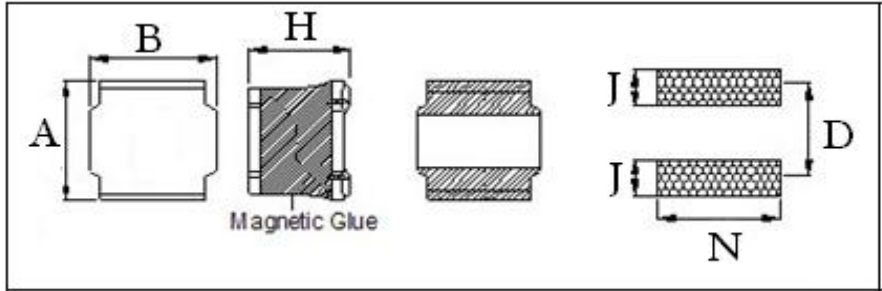

产品型号	A±0.3	B±0.3	H Max	D	N	J	最小包装数量
NR8040	8.0	8.0	4.3	5.6	7.5	1.8	1500PCS/卷

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
NR8040-0R9N	0.9	±30%	100KHz/0.1V	0.0078	7.8
NR8040-1R4N	1.4	±30%	100KHz/0.1V	0.0091	7.0
NR8040-2R0N	2.0	±30%	100KHz/0.1V	0.0117	6.3
NR8040-3R6N	3.6	±30%	100KHz/0.1V	0.0195	4.9
NR8040-4R7N	4.7	±30%	100KHz/0.1V	0.0234	4.1
NR8040-6R8N	6.8	±30%	100KHz/0.1V	0.0325	3.7
NR8040-100M	10	±20%	100KHz/0.1V	0.0442	3.1
NR8040-150M	15	±20%	100KHz/0.1V	0.0650	2.4
NR8040-220M	22	±20%	100KHz/0.1V	0.858	2.2
NR8040-330M	33	±20%	100KHz/0.1V	0.130	1.7
NR8040-470M	47	±20%	100KHz/0.1V	0.195	1.4
NR8040-680M	68	±20%	100KHz/0.1V	0.299	1.2
NR8040-820M	82	±20%	100KHz/0.1V	0.320	1.1
NR8040-101M	100	±20%	100KHz/0.1V	0.377	1.0
NR8040-121M	120	±20%	100KHz/0.1V	0.390	0.9

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司。

深圳市安瑞科电子有限公司 [优质功率电感专业生产商...](#) Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818