


Anruike 安瑞科/VERTICAL FIXED INDUCTOR PK0406 SERIES

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科

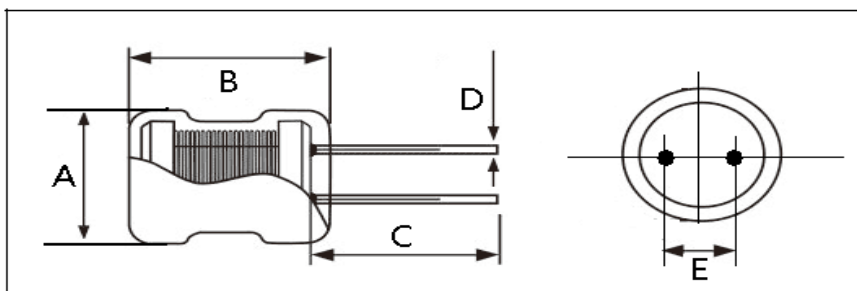

产品型号	A (MAX)	B (MAX)	C (REC)	D	E	最小包装数数量
PK0406	5.0	7.5	15	0.5	1.8/2.0	2000PCS/袋

电气参数 Electrical parameters

Anruike/安瑞科

产品型号	电感量 (μ H)	公差 (%)	测试频率 (MHZ)	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
PK0406-4R7M	4.7	± 20	7.96	0.04	2.0
PK0406-5R6M	5.6	± 20	7.96	0.042	1.9
PK0406-100K	10	± 10	2.52	0.08	1.6
PK0406-120K	12	± 10	2.52	0.12	1.5
PK0406-220K	22	± 10	2.52	0.14	1.0
PK0406-270K	27	± 10	2.52	0.16	1.45
PK0406-330K	33	± 10	2.52	0.19	1.40
PK0406-390K	39	± 10	2.52	0.22	0.7
PK0406-470K	47	± 10	2.52	0.26	0.6
PK0406-820K	82	± 10	2.52	0.35	0.5
PK0406-101K	100	± 10	0.796	0.54	0.46
PK0406-121K	120	± 10	0.796	0.7	0.40
PK0406-151K	150	± 10	0.796	0.98	0.38
PK0406-181K	180	± 10	0.796	1.2	0.24
PK0406-221K	220	± 10	0.796	2.0	0.22
PK0406-271K	270	± 10	0.796	2.8	0.2
PK0406-471K	470	± 10	0.796	3.5	0.19
PK0406-561K	560	± 10	0.796	4.0	0.18
PK0406-681K	680	± 10	0.796	4.3	0.17
PK0406-821K	820	± 10	0.796	5.5	0.165
PK0406-102K	1000	± 10	0.252	7.0	0.15
PK0406-202K	2000	± 10	0.252	14.0	0.12
PK0406-332K	3300	± 10	0.252	21.5	0.08
PK0406-472K	1700	± 10	0.252	50.00	0.07
PK0406-103K	10000	± 10	0.252	60.00	0.035
PK0406-153K	15000	± 10	0.252	115	0.01
PK0406-303K	30000	± 10	0.252	255	

以上为常用参数,精准参数以样品为准。因版面限制未能全部录入,需更多参数或特殊要求请联系我司。

深圳市安瑞科电子有限公司 优质功率电感专业生产商...Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818