


Anruike 安瑞科/VERTICAL FIXED INDUCTOR PK0912 SERIES

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科

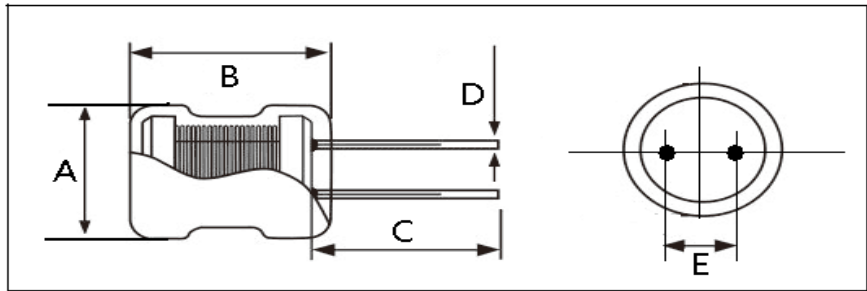

产品型号	A (MAX)	B (MAX)	C (REC)	D	E	最小包装数量
PK0912	11.0	13.5	15	0.8	5.0/6.0	300PCS/袋

电气参数 Electrical parameters

Anruike/安瑞科

产品型号	电感量(uH)	公差 (%)	测试频率 (MHZ)	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
PK0912-100K	10	±10	2.52	0.015	4.0
PK0912-120K	12	±10	2.52	0.017	3.9
PK0912-150K	15	±10	2.52	0.021	3.8
PK0912-180K	18	±10	2.52	0.025	3.30
PK0912-220K	22	±10	2.52	0.03	3.00
PK0912-270K	27	±10	2.52	0.035	2.80
PK0912-330K	33	±10	2.52	0.04	2.4
PK0912-390K	39	±10	2.52	0.043	2.2
PK0912-470K	47	±10	2.52	0.05	2.0
PK0912-560K	56	±10	2.52	0.059	1.9
PK0912-680K	68	±10	2.52	0.075	1.75
PK0912-820K	82	±10	2.52	0.85	1.60
PK0912-101K	100	±10	0.796	0.10	1.35
PK0912-121K	120	±10	0.796	0.12	1.3
PK0912-151K	150	±10	0.796	0.15	1.15
PK0912-181K	180	±10	0.796	0.2	1.10
PK0912-221K	220	±10	0.796	0.23	0.95
PK0912-271K	270	±10	0.796	0.3	0.85
PK0912-331K	330	±10	0.796	0.35	0.73
PK0912-391K	390	±10	0.796	0.40	0.70
PK0912-471K	470	±10	0.796	0.42	0.65
PK0912-561K	560	±10	0.796	0.5	0.55
PK0912-681K	680	±10	0.796	0.61	0.50
PK0912-821K	820	±10	0.796	0.8	0.48
PK0912-102K	1000	±10	0.252	0.91	0.43
PK0912-222K	2200	±10	0.252	1.95	0.3
PK0912-332K	3300	±10	0.252	2.5	0.26
PK0912-392K	3900	±10	0.252	3.0	0.23

PK0912-472K	4700	±10	0.252	4.3	0.19
PK0912-562K	5600	±10	0.252	6.40	0.19
PK0912-682K	6800	±10	0.252	8.20	0.18
PK0912-822K	8200	±10	0.252	8.50	0.17
PK0912-103K	10000	±10	0.252	9.6	0.13
PK0912-223K	22000	±10	0.252	13.5	0.12
PK0912-393K	39000	±10	0.252	25.0	0.03
PK0912-473K	47000	±10	0.252	29.8	0.02
以上为常用参数,精准参数以样品为准。因版面限制未能全部录入,需更多参数或特殊要求请联系我司。					

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818