
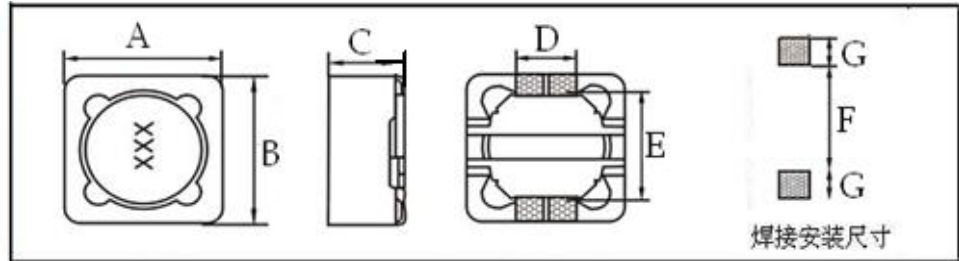


Anruike 安瑞科/SMD POWER INDUCTORS CDRH105 SERIES

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科



| 产品型号 | A±0.3 | B±0.3 | C (MAX) | D | E | F | G | 载带盘装 |
|---------|-------|-------|---------|-----|-----|-----|-----|-----------|
| CDRH105 | 10.0 | 10.0 | 5.5 | 4.6 | 6.4 | 6.2 | 1.7 | 1000PCS/R |

电气性能 Electrical properties

Anruike/安瑞科 www.anruike.com Tel:0755-29805463

| 产品型号 | 电感量 (uH) | 公差 (%) | 测试频率 | 直流电阻 RDC (Ω) (Max) | 额定电流 IDC (A) (Max) |
|--------------|----------|--------|--------------|--------------------|--------------------|
| CDRH105-2R2N | 2.2 | 30% | 100KHz/0.25V | 0.020 | 8.5 |
| CDRH105-6R8N | 6.8 | ±30 | 100KHz/0.25V | 0.025 | 7.5 |
| CDRH105-100M | 10 | ±20 | 100KHz/0.25V | 0.030 | 6.5 |
| CDRH105-120M | 12 | ±20 | 100KHz/0.25V | 0.035 | 6.0 |
| CDRH105-150M | 15 | ±20 | 100KHz/0.25V | 0.045 | 5.2 |
| CDRH105-180M | 18 | ±20 | 100KHz/0.25V | 0.060 | 4.50 |
| CDRH105-220M | 22 | ±20 | 100KHz/0.25V | 0.064 | 4.3 |
| CDRH105-270M | 27 | ±20 | 100KHz/0.25V | 0.078 | 3.5 |
| CDRH105-330M | 33 | ±20 | 100KHz/0.25V | 0.09 | 3.3 |
| CDRH105-390M | 39 | ±20 | 100KHz/0.25V | 0.10 | 3.1 |
| CDRH105-470M | 47 | ±20 | 100KHz/0.25V | 0.12 | 3.0 |
| CDRH105-560M | 56 | ±20 | 100KHz/0.25V | 0.14 | 2.7 |
| CDRH105-680M | 68 | ±20 | 100KHz/0.25V | 0.16 | 2.5 |
| CDRH105-820M | 82 | ±20 | 100KHz/0.25V | 0.22 | 2.3 |
| CDRH105-101M | 100 | ±20 | 100KHz/0.25V | 0.25 | 2.1 |
| CDRH105-121M | 120 | ±20 | 100KHz/0.25V | 0.35 | 2.0 |
| CDRH105-151M | 150 | ±20 | 100KHz/0.25V | 0.4 | 1.9 |
| CDRH105-181M | 180 | ±20 | 100KHz/0.25V | 0.5 | 1.6 |
| CDRH105-221M | 220 | ±20 | 100KHz/0.25V | 0.7 | 1.4 |
| CDRH105-271M | 270 | ±20 | 100KHz/0.25V | 0.8 | 1.3 |
| CDRH105-331M | 330 | ±20 | 100KHz/0.25V | 0.83 | 1.1 |
| CDRH105-391M | 390 | ±20 | 100KHz/0.25V | 0.85 | 0.60 |
| CDRH105-471M | 470 | ±20 | 100KHz/0.25V | 0.88 | 1.2 |
| CDRH105-561M | 560 | ±20 | 100KHz/0.25V | 1.0 | 0.8 |
| CDRH105-681M | 680 | ±20 | 100KHz/0.25V | 1.3 | 0.6 |
| CDRH105-821M | 820 | ±20 | 100KHz/0.25V | 1.8 | 0.5 |
| CDRH105-102M | 1000 | ±20 | 100KHz/0.25V | 2.0 | 0.4 |

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商.. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818