
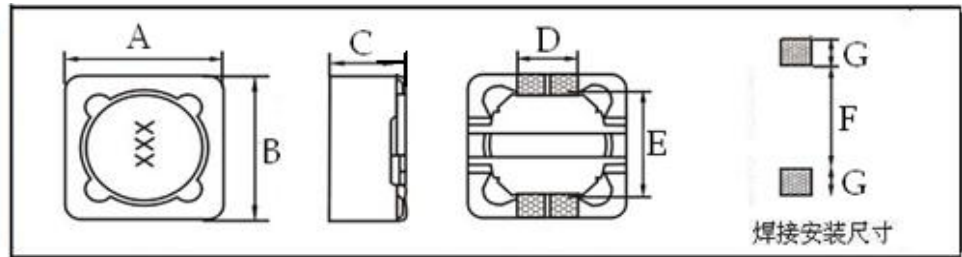


# Anruike 安瑞科/SMD POWER INDUCTORS CDRH124 SERIES

外型及尺寸 Shape and size ( unit: mm )

Anruike/安瑞科



产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH124	12.0	12.0	4.5	5.0	7.6	7.0	2.9	500PCS/R

电气性能 Electrical properties

Anruike/安瑞科

[www.anruike.com](http://www.anruike.com)

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH124-4R7N	4.7	±30	100KHz/0.25V	0.018	8.00
CDRH124-6R8N	6.8	±30	100KHz/0.25V	0.026	8.5
CDRH124-100M	10	±20	100KHz/0.25V	0.03	8.0
CDRH124-120M	12	±20	100KHz/0.25V	0.038	6.3
CDRH124-150M	15	±20	100KHz/0.25V	0.044	5.9
CDRH124-180M	18	±20	100KHz/0.25V	0.057	4.00
CDRH124-220M	22	±20	100KHz/0.25V	0.068	5.0
CDRH124-270M	27	±20	100KHz/0.25V	0.080	4.5
CDRH124-330M	33	±20	100KHz/0.25V	0.092	4.0
CDRH124-390M	39	±20	100KHz/0.25V	0.13	3.8
CDRH124-470M	47	±20	100KHz/0.25V	0.150	3.6
CDRH124-560M	56	±20	100KHz/0.25V	0.190	3.3
CDRH124-680M	68	±20	100KHz/0.25V	0.220	2.8
CDRH124-820M	82	±20	100KHz/0.25V	0.235	2.6
CDRH124-101M	100	±20	100KHz/0.25V	0.26	2.5
CDRH124-121M	120	±20	100KHz/0.25V	0.30	1.50
CDRH124-151M	150	±20	100KHz/0.25V	0.36	1.95
CDRH124-181M	180	±20	100KHz/0.25V	0.620	1.8
CDRH124-221M	220	±20	100KHz/0.25V	0.700	1.6
CDRH124-271M	270	±20	100KHz/0.25V	0.80	1.45
CDRH124-331M	330	±20	100KHz/0.25V	0.85	1.35
CDRH124-391M	390	±20	100KHz/0.25V	0.9	1.0
CDRH124-471M	470	±20	100KHz/0.25V	1.0	0.9
CDRH124-561M	560	±20	100KHz/0.25V	1.1	0.8
CDRH124-681M	680	±20	100KHz/0.25V	1.2	0.7
CDRH124-821M	820	±20	100KHz/0.25V	1.25	0.6

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818