
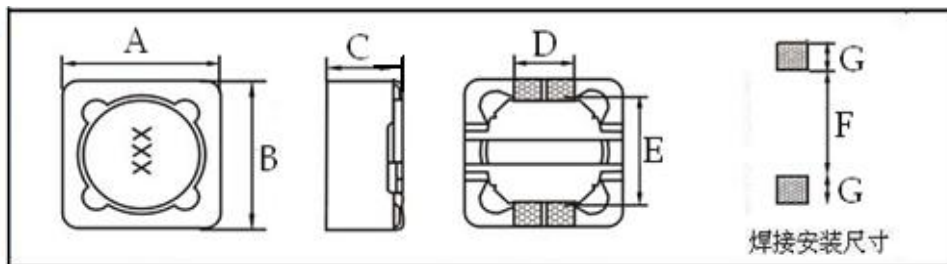


Anruike 安瑞科/SMD POWER INDUCTORS **CDRH125** SERIES

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH125	12.0	12.0	6.0	5.0	7.6	7.0	2.9	500PCS/R

电气性能 Electrical properties Anruike/安瑞科 www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH125-100M	10	±20	100KHz/0.25V	0.021	8.5
CDRH125-120M	12	±20	100KHz/0.25V	0.027	7.4
CDRH125-150M	15	±20	100KHz/0.25V	0.037	7.0
CDRH125-180M	18	±20	100KHz/0.25V	0.040	6.3
CDRH125-220M	22	±20	100KHz/0.25V	0.046	5.5
CDRH125-270M	27	±20	100KHz/0.25V	0.051	5.0
CDRH125-330M	33	±20	100KHz/0.25V	0.065	4.5
CDRH125-390M	39	±20	100KHz/0.25V	0.068	4.00
CDRH125-470M	47	±20	100KHz/0.25V	0.08	3.9
CDRH125-560M	56	±20	100KHz/0.25V	0.09	3.50
CDRH125-680M	68	±20	100KHz/0.25V	0.11	3.2
CDRH125-820M	82	±20	100KHz/0.25V	0.140	2.80
CDRH125-101M	100	±20	100KHz/0.25V	0.171	2.6
CDRH125-121M	120	±20	100KHz/0.25V	0.19	2.3
CDRH125-151M	150	±20	100KHz/0.25V	0.25	2.1
CDRH125-181M	180	±20	100KHz/0.25V	0.35	1.8
CDRH125-221M	220	±20	100KHz/0.25V	0.400	1.7
CDRH125-271M	270	±20	100KHz/0.25V	0.460	1.6
CDRH125-331M	330	±20	100KHz/0.25V	0.56	1.4
CDRH125-391M	390	±20	100KHz/0.25V	0.690	1.3
CDRH125-471M	470	±20	100KHz/0.25V	0.770	1.2
CDRH125-561M	560	±20	100KHz/0.25V	0.860	1.1
CDRH125-681M	680	±20	100KHz/0.25V	1.200	1.0
CDRH125-821M	820	±20	100KHz/0.25V	1.45	0.9
CDRH125-102M	1000	±20	100KHz/0.25V	1.65	0.8

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818